



## 2-PORT USB 3.0 PCI EXPRESS CARD

### **SUPER SPEED USB 3.0**

Transfer files up to 10 times faster than through USB 2.0

### **COMPATIBLE WITH YOUR DEVICES**

Backwards compatibility with USB 2.0 and 1.1 ensures that you can connect all your USB devices to your PC

### **SIMPLE TO INSTALL**

Just slide it into your desktop's Express Card slot to instantly add 2 USB 3.0 ports



### **BLAZING USB 3.0 SPEED**

Connect your PC to USB 3.0 devices at blazing speeds of up to 5 Gbps - up to 10 times faster than USB 2.0. You can back up your photos, music, and HD movies to an external storage device faster than ever before.

### **PLUG AND PLAY CONNECTIVITY**


Just insert the card into an available PCI Express x1 slot and run the Setup CD to add 2 USB 3.0 ports to your PC.

### **CONNECT ALL YOUR PERIPHERALS**

Backward compatibility with USB 2.0 and USB 1.1 mean that you can connect any USB device to the DUB-1310. If you need more ports, you can connect additional USB hubs to connect up to 127 devices.

### WHAT THIS PRODUCT DOES

The DUB-1310 2-Port USB 3.0 PCI Express Card adds 2 USB 3.0 ports to your PC, allowing you to connect peripherals such as external storage, digital cameras, printers, and more.

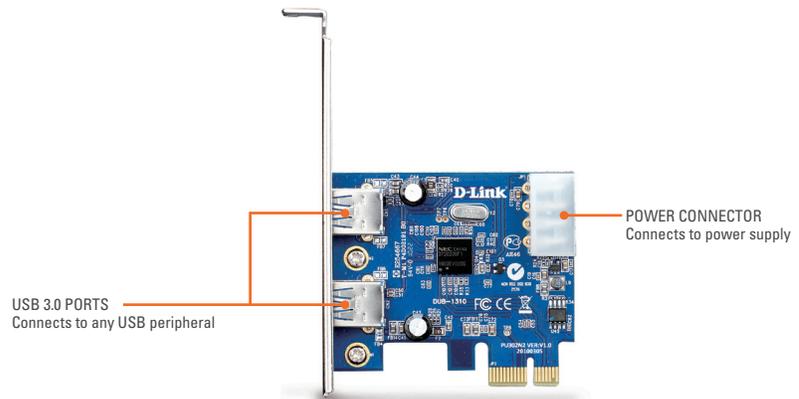

### TECHNICAL SPECIFICATIONS

#### INTERFACE

- PCI Express x1
- 2 downstream USB Type A (female) ports

#### STANDARDS

- USB specification version 3.0
- USB specification version 2.0
- USB specification version 1.1 1
- USB specification version 1.0
- OHCI (Open Host Controller Interface)
- EHCI (Enhanced Host Controller Interface)
- PCI Express 2.0

#### DATA RATES

- SuperSpeed: 4.8 Gbps
- High Speed: 480 Mbps
- Full Speed: 12 Mbps
- Low Speed: 1.5 Mbps

#### CONNECTIVITY

- Up to 127 devices by cascading multiple hubs

#### SYSTEM REQUIREMENTS

- Windows® 7/Vista/XP SP3 or higher
- Available PCI Express x1 slot

#### SUPPLIED POWER

- Maximum 900 mA per port

#### DIMENSIONS (L x W x H)

- 75.8 x 61.5 x 2.0 mm (2.98 x 2.42 x 0.08 inches)

#### WEIGHT

- 43 grams

#### OPERATING TEMPERATURE

- 0 to 40 °C (32 to 104 °F)

#### STORAGE TEMPERATURE

- -20 to 60 °C (-4 to 140 °F)

#### OPERATING HUMIDITY

- 0% to 80% (non-condensing)

#### PACKAGE CONTENTS

- D-Link 2-Port USB 3.0 PCI Express Card
- Full-height bracket
- Half-height bracket

#### CERTIFICATIONS

- USB-IF
- WHQL
- FCC
- CE

<sup>1</sup> Using a USB 1.1 port will affect device performance.

<sup>2</sup> Maximum transfer rate based on USB 3.0 specifications. Actual data throughput will vary.

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, actual product appearance may differ than that depicted on the packaging.



D-Link Corporation  
No. 289 Xinhu 3rd Road, Neihu, Taipei 114, Taiwan  
Specifications are subject to change without notice.  
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners.  
©2010 D-Link Corporation. All rights reserved.  
Release 01 (July 2010)