

## Product Highlights

### Enhanced Network Capacity

Increase network capacity by adding 5GHz wireless connectivity for smartphones, notebooks or other portable devices

### Multiple Operational Modes

Functions as an access point, wireless distribution system (WDS), WDS with AP, repeater, wireless client, WISP client router and repeater

### Full Featured Security

Includes industry standard wireless encryption along with support for multiple SSIDs and VLANs, allowing for complete control over network access



## DAP-3410

# Wireless N 5GHz PoE Outdoor Access Point with PoE Pass-Through

## Features

### For Business-Class Environment

- 5 GHz 802.11a/n connectivity for increased network capacity
- High power radio design<sup>1</sup>
- Built-in high gain sector antenna
- Waterproof IPX6 standard<sup>2</sup>

### High Performance Connectivity

- Up to 300 Mbps<sup>3</sup>
- Two 10/100 Ethernet ports

### Trusted Security Features

- WPA/WPA2-Personal/Enterprise
- 64/128 bit WEP encryption
- 802.1x
- MAC address filter
- Client isolation
- User limit

### Convenient Installation

- Proprietary PoE design
- PoE pass-through<sup>4</sup>
- Wall/pole mount included

The DAP-3410 Wireless N 5GHz PoE Outdoor Access Point with PoE Pass-Through is the ideal solution for expanding the coverage and signal strength of any wireless network. Built to withstand harsh environments, the DAP-3410 also excels in connecting separate networks that cannot be joined physically using Ethernet cable or fibre. Multiple operating modes, network management tools and security features give network administrators a wide range of choices for deploying the device, allowing for the addition of increased connectivity to wireless network-enabled devices.

## Increased Network Connectivity And Throughput

Expand current wireless network capacity with the less congested 5GHz frequency wireless band. In addition, two 10/100 Ethernet ports (one supporting PoE) allow for further network expansion through wired Ethernet connectivity. The built-in 15 dBi sector antenna has high power output, ensuring that wireless coverage will cover even hard to reach locations. Whether trying to connect additional wireless devices such as smartphones or laptops, or bringing connectivity to networks separated by short distances, the DAP-3410 has it covered.

## Flexible Deployment Options

The DAP-3410 features seven multiple operation modes, allowing it to adapt to any situation. As a standard wireless access point (AP) the DAP-3410 can connect to a wide range of devices. In wireless distribution system (WDS) mode it can expand current wireless coverage without the need for a wired backbone link<sup>5</sup>. As a wireless client it can connect to an existing AP, and expand the network physically with the two built-in 10/100 Ethernet ports. Repeater mode will extend current wireless coverage eliminating dead spots and weak signals. WISP mode functionality includes the ability to function as a client or repeater.

## Wireless N 5GHz PoE Outdoor Access Point with PoE Pass-Through

### Fine-Tuned Control Over Network Resources

The DAP-3410 supports up to 8 SSIDs, allowing the administrators to logically divide the access point into several virtual access points all within a single hardware platform. Rather than having separate networks with several access points, administrators can deploy one single AP to support more than one application, such as public Internet access and internal network control to increase flexibility and keep costs down. The DAP-3410 supports 802.1Q VLAN Tagging, operating with multiple SSIDs to segment traffic to enhance performance and security. The DAP-3410 provides WLAN partitioning, a useful function for deployments such as hot spots. With station-to-station partitioning enabled, security is enhanced, since wireless users cannot peek at each other, and the possibility for data theft is reduced.

### Robust Security And Management Tools

The DAP-3410 supports 64/128-bit WEP data encryption and WPA/WPA2 security functions. In addition, it provides MAC Address Filtering to control user access, and the Disable SSID Broadcast function to limit outsiders' access to the internal network. Network administrators have multiple options for managing the DAP-3410, including HTTP and HTTPS. For advanced network management, administrators can use SNMPv1, v2c, v3 to configure and manage access points.

### Power over Ethernet (PoE)

The DAP-3410 is powered by PoE<sup>s</sup> which allows for convenient installation, especially in places where a power supply is not reliable or power cables are not available or easily set up. Also, the DAP-3410 can supply power to a connected surveillance camera through PoE, including the DCS-3716, DCS-6113, and DCS-7110 cameras.



If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. Our highly trained technicians are on standby around the clock, ensuring that award-winning support is only a phone call away.

With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

#### D-Link Assist Gold - for comprehensive 24-hour support

D-Link Assist Gold is perfect for mission-critical environments where maximum uptime is a high priority. It guarantees four hour around-the-clock response. Cover applies 24/7 for every day of the year including holidays.

#### D-Link Assist Silver - for prompt same-day assistance


D-Link Assist Silver is designed for 'high availability' businesses that require rapid response within regular working hours. It provides a four hour response service Monday to Friday from 8am to 5pm, excluding holidays.

#### D-Link Assist Bronze - for guaranteed response on the next business day

D-Link Assist Bronze is a highly cost-effective support solution for less critical environments. Response is guaranteed within eight business hours Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed. D-Link Assist also offers installation and configuration services to get your new hardware working quickly and correctly.

# Wireless N 5GHz PoE Outdoor Access Point with PoE Pass-Through

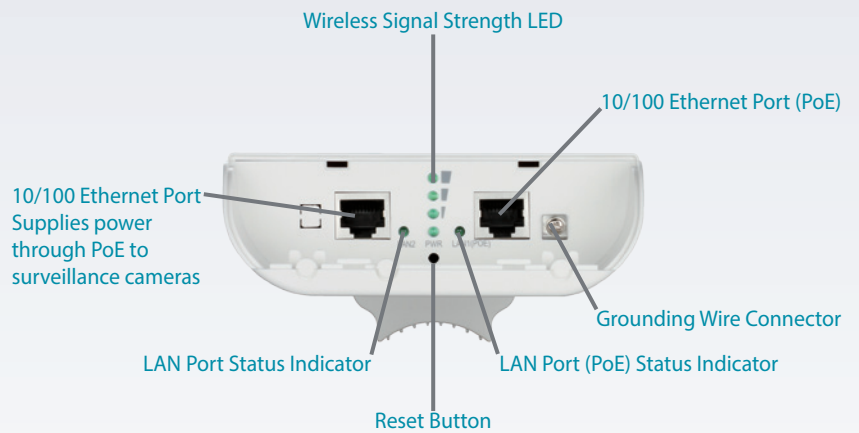

## Technical Specifications

### General

Device Interfaces	<ul style="list-style-type: none"> <li>• 802.11a/n wireless</li> <li>• Reset button</li> </ul>	<ul style="list-style-type: none"> <li>• Two 10/100 Ethernet port (one supports PoE)</li> <li>• Grounding wire connector<sup>6</sup></li> </ul>
LED	<ul style="list-style-type: none"> <li>• Power</li> <li>• LAN</li> </ul>	<ul style="list-style-type: none"> <li>• Wireless Signal Strength<sup>7</sup></li> </ul>
Antenna	<ul style="list-style-type: none"> <li>• 15 dBi Sector Antenna</li> </ul>	
Wireless Frequency	<ul style="list-style-type: none"> <li>• 5 GHz</li> </ul>	
Standards	<ul style="list-style-type: none"> <li>• IEEE 802.11 a/n</li> <li>• IEEE 802.3u</li> </ul>	<ul style="list-style-type: none"> <li>• IEEE 802.3</li> </ul>

### Functionality

Operation Mode	<ul style="list-style-type: none"> <li>• AP</li> <li>• WDS</li> <li>• WDS with AP</li> <li>• Wireless Client</li> </ul>	<ul style="list-style-type: none"> <li>• Repeater</li> <li>• WISP Repeater</li> <li>• WISP Client Router</li> </ul>
Network Management	<ul style="list-style-type: none"> <li>• Web Browser Interface</li> <li>• HTTP – Secure HTTP (HTTPS)</li> </ul>	<ul style="list-style-type: none"> <li>• SNMP v1, v2c and v3</li> </ul>
Security	<ul style="list-style-type: none"> <li>• WPA2-Personal/Enterprise</li> <li>• WPA-Personal/Enterprise</li> </ul>	<ul style="list-style-type: none"> <li>• WEP 64/128 bit Encryption</li> <li>• 802.1X</li> </ul>
SSID/VLAN	<ul style="list-style-type: none"> <li>• Support for up to 8 SSIDs/VLANs</li> </ul>	

# Wireless N 5GHz PoE Outdoor Access Point with PoE Pass-Through

Physical	
Dimensions	• 48 x 96 x 165 mm (1.88 x 3.77 x 6.49 inches)
Weight	• 350 grams (0.77 lbs)
Power	• Input: 48 V 0.5 A
Temperature	• Operating: -20 to 60 °C (-4 to 140 °F)      • Storage: -20 to 85 °C (-4 to 185 °F)
Humidity	• Operating: 0% to 90% non-condensing      • Storage: 5% to 95% non-condensing
ESD Protection	• 15 kV
Certifications	• CE      • FCC
Antenna Patterns	
Orientation	E-Plane
5 GHz Wall Mounted	

<sup>1</sup> Maximum power setting will vary according to individual country regulations.  
<sup>2</sup> IPX6 standard means the device is protected from low pressure jets of water from all directions - limited ingress permitted. It is recommended to place this device under a roof, shelter or in weather-proof box when deployed in severe weather environments.  
<sup>3</sup> Maximum wireless signal rate derived from IEEE Standard 802.11g, and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors may adversely affect wireless signal range.  
<sup>4</sup> Provides a secondary Ethernet port with POE output for supported D-Link IP cameras. The supported cameras include D-Link DCS-3716, DCS-6113, and DCS-7110.  
<sup>5</sup> WDS mode only works with other DAP-3410 access points  
<sup>6</sup> Grounding wire is not included in package content and we suggest using 16 -18 AWG grounding wire for normal lightning and electricity current.  
<sup>7</sup> LED Signal Strength Indication only supports in Wireless Client, Repeater, WDS and WISP modes.  
<sup>8</sup> Although compatible with DD-WRT, please be advised that if DD-WRT is used this will void your warranty and D-Link will not accept responsibility or support any products that may adversely be affected as a result of using DD-WRT.



For more information: [www.dlink.com](http://www.dlink.com)

D-Link European Headquarters. D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2014 D-Link Corporation. All rights reserved. E&OE.

Updated September 2014

