

Product Highlights

See More in Greater Detail

HD 720p with motorised pan and tilt allows you to monitor a large area and see more in greater detail

Motion Detection with Night Vision

Never miss a thing with the ability to be notified when motion is detected. Night vision ensures clear images even in low-light conditions

mydlink™-enabled Cloud Access

Easy setup, management and remote viewing of your camera through the free mydlink™ app on your mobile device or via the secure mydlink™ web portal



DCS-5030L

HD Pan & Tilt Wi-Fi Day/Night Camera

Features

Camera

- High quality CMOS sensor for crystal clear images
- Pan and Tilt functions to cover a large area
- Built-in IR LEDs to capture video in low-light environments

Wi-Fi Connectivity

- Wireless 802.11n gives increased speed, range, and reliability
- Place anywhere without the need for additional network cabling

Sound and Video

- Real-time H.264 and MJPEG compression for reduced video file size
- Sound and motion detection

Remote and Mobile Access

- Support for mydlink Lite lets you manage your camera from anywhere with Internet access
- Remote video monitoring via the mydlink website

Ease Of Use

- Supports WPS for simple, secure wireless setup
- Send snapshots or video clips to an FTP site or through E-mail

The DCS-5030L HD Pan & Tilt Wi-Fi Day/Night Camera provides a range of features to help you effectively monitor large areas of your home or small office at all hours of the day. The pan/tilt function allows the camera to patrol a wide area, while the built-in IR LEDs provide around the clock surveillance in all lighting conditions. Extra details are captured in 720p high-definition resolution and H.264 compression saves space without sacrificing performance. An integrated microSD card slot¹ allows you to record videos directly onto the camera, without the need of a computer. You can set up the camera to record only when motion or sound is detected. Wireless connectivity means that there is no need for additional cabling and Micro-USB input lets you power the device using universal cables and power adapters, making setup quick and hassle-free.

Peace of Mind with 24/7 Monitoring of any Environment

The DCS-5030L is a standalone surveillance camera that requires no special hardware or software. It can run independently even without a PC. Send e-mail notifications with snapshots or video clips whenever motion or sound is detected using just the DCS-5030L and an Internet connection. You can select areas of the video image to monitor for motion, allowing you to effectively monitor areas such as entryways. You can also set volume thresholds to determine the sound level required to trigger a notification, great for detecting the sound of an intruder or vehicle, or the cry of a baby. Night time monitoring is also possible thanks to built-in infrared LEDs which allow for night time viewing of up to 5 metres, enabling round-the-clock monitoring of your home or small office.

Sharp Image Monitoring from Different Angles

By providing you with sharp, responsive pan and tilt movement along with digital zoom, the HD Pan & Tilt Wi-Fi Day/Night Camera gives you full control. You can quickly scan a wide area from a variety of angles. 4x digital zoom lets you zoom in on specific areas for more detail. The DCS-5030L can also be set to move to specific preset positions, allowing the camera to focus on particular areas of interest within the surveillance area.

mydlink™: the easiest way to setup up your camera and monitor your home

Connecting a camera to your network and accessing it has traditionally required complex configuration. mydlink makes it easy to access your camera from wherever you are, whenever it's convenient for you. Using the free mydlink Lite app for iOS and Android smartphones and tablets, you can connect and setup your mydlink camera without turning on a computer. A step-by-step guide has your camera up and running in a matter of minutes. Through the mydlink Lite app, you can set up a free mydlink account which allows you to view and manage your camera from any Internet connected computer. If you have more than one mydlink camera, you can add it to your existing mydlink account and watch all your cameras from a single location.


Accessing your cameras on the go is easy too. Just download the free mydlink Lite app for your iPhone or Android device and you can quickly and easily view your camera feed from anywhere with a wireless or 3G/4G LTE connection. Thanks to this app, you can monitor on-the-go even if you don't have access to a computer.

If you have a mydlink-enabled Cloud Router, setting up and configuring your DCS-5030L is a 1, 2, 3, thanks to Zero Configuration. Simply connect your camera to its power adapter and then connect your camera to your Cloud Router with an Ethernet cable - the camera will automatically be added to your account.

mydlink Lite App



With the free mydlink Lite app for iOS, Android and Windows Phone devices you can quickly and easily monitor your home or office anywhere with a Wi-Fi or mobile Internet connection.

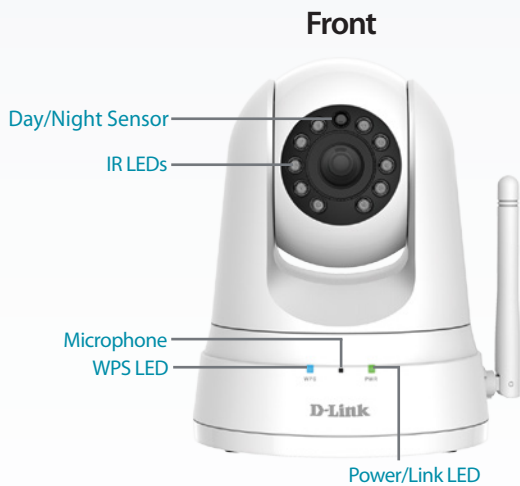

Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/4" HD progressive CMOS sensor • 5 metre IR illumination distance • Minimum illumination: <ul style="list-style-type: none"> • 0 lux with IR LEDs on • 1 lux (colour), 0.5 lux (B&W) with IR LEDs off • Built-in Infrared-Cut Removable (ICR) Filter module • Lens: Fixed length 2.38 mm • Aperture: F2.2 	<ul style="list-style-type: none"> • 4X digital zoom • Angle of view: <ul style="list-style-type: none"> • (H) 94.36° • (V) 59.3° • (D) 110.44° • Built-in microphone • microSD card slot¹
Image Features	<ul style="list-style-type: none"> • Configurable image size and quality • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Pre-event snapshot/recording
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/MJPEG format compression 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • H.264: 1280 x 720 (default), 640 x 480, 320 x 240 at frame rates up to 30 fps 	<ul style="list-style-type: none"> • MJPEG: 1280 x 720 (default), 640 x 480, 320 x 240 at frame rates up to 30 fps
Audio Compression	<ul style="list-style-type: none"> • G.711 μ-law 	

DCS-5030L HD Pan & Tilt Wi-Fi Day/Night Camera

Pan /Tilt	
Pan Range	• -170° to +170° (total 340°)
Tilt Range	• -20° to +90° (total 110°)
Angular Velocity	• 16° per second
Step Setting	• Pan 1°/2°/3°/4°/5°(default)/10°/15°/20°/25°/30° per click • Tilt: 1°/2°/3°/4°/5°(default)/10°/15°/20°/25°/30° per click
Network	
Connectivity	<ul style="list-style-type: none"> • 10/100 BASE-T Fast Ethernet port • Single-band 1T 1R mode supports a maximum data rate of 72.2 Mbps (PHY rate) using the 20 MHz band • 802.11n/g/b wireless
Network Protocols	<ul style="list-style-type: none"> • IPv4, ARP, TCP, UDP, ICMP • DHCP Client • NTP Client (D-Link) • DNS Client • DDNS Client (D-Link) • SMTP Client • FTP Client • HTTP Server • PPPoE • UPnP Port Forwarding • LLTD
Security	<ul style="list-style-type: none"> • WPS • WPA-PSK, WPA2 • HTTP digest encryption • Password authentication
Advanced Features	
System Requirements for Web Interfaces	<ul style="list-style-type: none"> • Operating system: Microsoft Windows Vista/7/8/10², Mac OS X 10.7 • Browser: Internet Explorer 8/Firefox 12/Safari 6/Chrome 20³ or higher with Java and/or ActiveX installed and enabled
Event Management	<ul style="list-style-type: none"> • Motion detection • Sound level detection • Event notification and uploading of snapshots/video clips via e-mail (SMTP) or FTP
Remote Access	
Remote Management	• Configuration accessible via web browser
Mobile support	<ul style="list-style-type: none"> • mydlink Lite app for iOS and Android • mydlink+ app for iOS and Android
General	
Weight	<ul style="list-style-type: none"> • Device: 292.4 grams (0.64 lbs) • Stand: 60.8 grams (0.13 lbs)
Power	• 5 V DC 1.5 A, 50/60 Hz
Power Consumption	• 5.56 W
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) • Storage: -25 to 70° C (-13 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 20% to 80% non-condensing • Storage: 5% to 90% non-condensing
Certifications	• CE, CE LVD, FCC Class B, ICES
Dimensions	<ul style="list-style-type: none"> • 116.4 x 109.1 x 133.6 mm (4.58 x 4.29 x 5.26 inches) (Camera only) • 116.4 x 109.1 x 230.0 mm (4.58 x 4.29 x 9.06 inches) (Including mounting bracket)

¹ MicroSD card not included. Supports card capacities up to 32 GB. ² Microsoft Edge is not supported. ³ mydlink Portal only.



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2017 D-Link Corporation. All rights reserved. E&OE.

Updated January 2017

D-Link[®]
Home is where the **SMART** is