



VIGILANCE
CAMERA RANGE

Professional Video Surveillance.
Simplified.
Affordable.



Vigilance Camera Range



The Vigilance Camera Range offers professional, full featured high definition video surveillance that is easy to install and highly affordable. The range consist of cameras designed specifically to meet different surveillance and environmental requirements. From standalone surveillance solutions that allow you to record video without additional software or equipment, to weather/vandal-proof cameras for harsh environments.

The Vigilance Camera Range includes:



Full HD / 5-Megapixel Outdoor PoE Vandal-Proof Dome Camera DCS-4602EV / DS-4605EV

3D Noise Reduction

- Allows the camera to capture clearer videos with less noise under poor lighting conditions.
- Ideal when facial or object identification is required.
- Helps to reduce backend storage provisioning.

Weather and Vandal proof

- Toughened metal, industry-certified IK-10 (vandal-proof) and IP-66 (weather-proof) housing designed for use in harsh environments.
- Specifically built to withstand sudden high impact and adverse weather conditions.




Full HD PoE Dome Camera DCS-4603

Integrated IR illuminator with IRC-filter

- Allows the camera to see in complete darkness with detailed grayscale images.
- Capture crisp colour images during daytime with ICR-filter to block unwanted infrared light.

Wide Dynamic Range

- Effective in contrasting light conditions, giving clear footage from shadowed areas as well as brightly lit spaces.

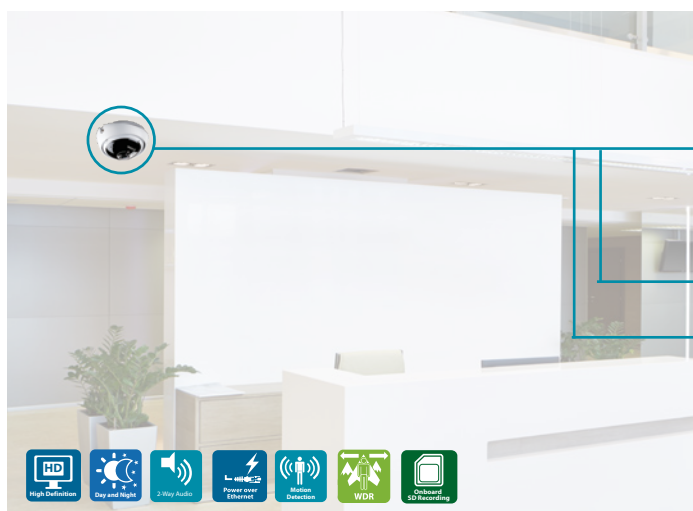

Full HD Panoramic PoE Camera DCS-4622

360° Whole Room Coverage

- See it all with a wide-angle fisheye lens that gives you complete 360° coverage that lets you monitor a large area with a single camera

HD Image Quality and Detail

- High-resolution 3-megapixel sensor provides a high-resolution image (up to 1920 x 1536) to monitor a large area with excellent detail

A Versatile Little Camera That Does It All

- Night vision, two-way audio, motion detection, triggered snapshots and recordings and even support for PoE so you can place it anywhere



3-Megapixel Outdoor PoE Vandal-Proof Dome Camera DCS-4633EV

Improved Video Performance

- Support for the latest H.265 High Efficiency Video Coding standard maximises network bandwidth for enhanced quality

HD Image Quality and Detail

- High-resolution 3-megapixel sensor provides a high-resolution image (up to 2048 x 1536) to monitor a large area with excellent detail

Weather and Vandal proof

- Toughened metal, industry-certified IK-10 (vandal-proof) and IP-66 (weather-proof) housing designed for use in harsh environments. Specifically built to withstand sudden high impact and adverse weather conditions.



HD Outdoor PoE Mini Bullet Camera DCS-4701E

LowLight+

- High sensitivity camera sensor allows the camera to see details in colour, even in very low light conditions.

3D Noise Reduction

- Allows the camera to capture clearer videos with less noise under poor lighting conditions.
- Ideal when facial or object identification is required.
- Helps to reduce backend storage provisioning.



Full HD / 5-Megapixel Outdoor PoE Mini Bullet Camera DCS-4703E / DCS-4705E

High Resolution

- The professional 3/5 megapixel progressive scan CMOS sensor is ideal for surveillance applications

Long Distance Night Vision

- See up to 30 m in complete darkness with the high power infra-red illumination

Outdoor Installation

- The IP66 rated weatherproof enclosure means the camera can be mounted outdoors in temperatures ranging from -30 to 50 °C



Full HD Outdoor PoE Mini Dome Camera DCS-4802E

Wide Dynamic Range

- Allows the camera to see objects in contrasting light conditions.
- Ideal for entrances or windowed foyers where it is necessary to monitor both indoor and outdoor areas, or shadowed areas as well as brightly lit areas.

3-Axis Gimbal

- 3 axis mechanism gives horizontal, vertical and rotation adjustments.
- This provide greater flexibility to achieve the view you want, whether the camera is mounted on the ceiling or wall.

Free D-ViewCam™ Video Management Software DCS-100

Bundled free with D-Link network cameras D-ViewCam enables users to centrally manage multiple cameras for home or businesses.

Supporting up to 32 network cameras and up to 64 users, D-ViewCam is compatible with all current D-Link network cameras and video servers, offers digital monitoring and recording with a wide array of features including simultaneous video recording, playback and live view.

D-ViewCam offers scheduled, motion and manual recording. Recorded files can be searched by video type and selected files can be played, edited and converted into AVI or ASF files. The e-map mode in the application allows users to arrange a map with camera locations and orientation, while additional features such as auto-patrol, rotate, zoom, and focus provide optimal control over video surveillance.




Playback view


Live view

D-ViewCam Mobile

Keep an eye on your surveillance cameras anytime, anywhere with D-Link's D-ViewCam Mobile app. The D-ViewCam Mobile app makes it easy to check on your business no matter where you are, no matter what time of day it is.












For iPhones/iPads



For Android devices



									
Model	DCS-4602EV	DCS-4603	DCS-4605EV*	DCS-4622	DCS-4633EV	DCS-4701E	DCS-4703E	DCS-4705E*	DCS-4802E
Model Name	Vigilance Full HD Outdoor Vandal-Proof PoE Dome Camera	Vigilance Full HD PoE Dome Camera	Vigilance 5-Megapixel Vandal-Proof Outdoor Dome Camera	Vigilance Full HD Panoramic PoE Camera	Vigilance Full HD Panoramic PoE Camera	Vigilance HD Outdoor PoE Mini Bullet Camera	Vigilance Full HD Outdoor PoE Mini Bullet Camera	5-Megapixel Outdoor Mini Bullet Camera	Vigilance Full HD Outdoor PoE Mini Dome Camera
Indoor/Outdoor	Indoor and Outdoor IP66	Indoor only	Indoor and Outdoor IP66	Indoor only	Indoor and Outdoor IP66	Indoor and Outdoor IP66	Indoor and Outdoor IP66	Indoor and Outdoor IP66	Indoor and Outdoor IP66
Vandal-Proof	● (IK10)		● (IK10)		● (IK10)				
Image Sensor	1/2.7" 2-Megapixel progressive scan CMOS	1/3" 3-Megapixel progressive scan CMOS	1/2.9" 5-Megapixel progressive scan CMOS	1/3.2" 3-Megapixel progressive scan CMOS	1/3.2" 3-Megapixel progressive scan CMOS	1/2.7" 2-Megapixel progressive scan CMOS	1/3" 3-Megapixel progressive scan CMOS	1/2.5" 5-Megapixel progressive scan CMOS	1/3" 2-Megapixel progressive scan CMOS
Maximum Video Resolution (Ratio)	1920 x 1080 (16:9) 1600 x 1200 (other)	1920 x 1080 (16:9) 2048 x 1536 (other)	2592 x 1440 (16:9) 2560 x 1920 (other)	1920 x 1536 (other)	1920 x 1080 (16:9) 2048 x 1536 (other)	1920 x 1080 (16:9) 1440 x 1080 (other)	1920 x 1080 (16:9) 2048 x 1536 (other)	2592 x 1440 (16:9) 2560 x 1920 (other)	1920 x 1080 (16:9) 1440 x 1080 (other)
Maximum Frame Rate	Up to 30 fps	Up to 30 fps	Up to 30 fps	Up to 25 fps	Up to 30 fps	Up to 30 fps	Up to 30 fps	Up to 30 fps	Up to 30 fps
Lens	Fixed 2.8 mm, F1.8	Fixed 2.8 mm, F1.8	Fixed 2.8 mm, F2.0	Fixed 1.1 mm, F2.0	Fixed 2.8 mm, F1.85	Fixed 3.6 mm, F1.8	Fixed 3.6 mm, F1.8	Fixed 2.8 mm, F2.0	Fixed 2.8 mm, F1.8
Minimum Illumination (Lux)	0.1 lux (colour) 0.05 lux (B/W) 0 Lux (B&W, IR-LED on)	1.0 lux (colour) 0.5 lux (B/W) 0 Lux (B&W, IR-LED on)	0.01 lux (colour) 0.008 lux (B/W) 0 Lux (B&W, IR-LED on)	0.5 lux (colour) 0.25 lux (B/W) 0 Lux (B&W, IR-LED on)	0.01 lux (colour) 0.008 lux (B/W) 0 Lux (B&W, IR-LED on)	0.1 lux (colour) 0.05 lux (B/W) 0 Lux (B&W, IR-LED on)	0.2 lux (colour) 0.1 lux (B/W) 0 Lux (B&W, IR-LED on)	0.1 lux (colour) 0.05 lux (B/W) 0 Lux (B&W, IR-LED on)	1.0 lux (colour) 0.5 lux (B/W) 0 Lux (B&W, IR-LED on)
Infrared-Cut Removable Filter	●	●	●	●	●	●	●	●	●
IR Built-in	20 m	10 m	20m	8 m	20 m Smart IR	30 m	20 m	30 m	20 m
Wide Dynamic Range (WDR)	●	●	●	●	●	●	●	●	●
3D Noise Reduction	●	●	●	●	●	●	●	●	●
LowLight+									
Angle Of View (H/V/D)	120° / 66° / 140°	96° / 54° / 108°	87° / 65° / 110°	180° / 180° / 180°	105° / 80° / 137°	96° / 50° / 104°	70° / 40° / 80°	90° / 50° / 104°	96° / 54° / 108°
Gimbal	2-Axis Vertical: 60° / Horizontal 240°	2-Axis Vertical: 60° / Horizontal 350°	2-Axis Vertical: 60° / Horizontal 240°		2-Axis Vertical: 60° / Horizontal 340°				3-Axis Vertical: 60° / Horizontal 355° / Rotational 355°
Privacy Masks	3 zones	3 zones	3 zones		3 zones	3 zones	3 zones	3 zones	3 zones
Audio Codec				G.711, AAC					
2-Way Audio				●					
Built-in Microphone				●					
Built-in Speaker				●					
Wired Connection	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)	Fast Ethernet (10BASE-T, 100BASE-TX) Power over Ethernet (802.3af PoE)
Onboard Storage Card Slot	MicroSD SDXC (max. 128 GB)		MicroSD SDXC (up to v3.01)	MicroSD SDXC (max. 128 GB)	MicroSD SDXC (max. 128 GB)				
Maximum Power Consumption	6.6 W	5.6 W	6 W	4.6 W	6 W	3.1 W	6.4 W	3.1 W	5.2 W
Video Format	H.265 H.264 MJPEG	H.264 MJPEG	H.265 H.264 MJPEG	H.264 MJPEG	H.265 H.264 MJPEG	H.265 H.264 MJPEG	H.264 MJPEG	H.265 H.264 MJPEG	H.264 MJPEG
Multi-Stream	●	●	●	●	●	●	●	●	●
ONVIF	●	●	●	●	●	●	●	●	●
Digital Zoom	10x	10x	10x	10x	10x	10x	10x	10x	10x
Motion Detection	●	●	●	●	●	●	●	●	●
Event Recording	●	●	●	●	●	●	●	●	●
E-Mail Notification	●	●	●	●	●	●	●	●	●
Recording to NAS	●	●	●	●	●	●	●	●	●
IPv6 Support	●	●	●	●	●	●	●	●	●
Dimensions	Φ99 x 65 mm	Φ110 x 78 mm	Φ99 x 64.7 mm	Φ97 x 48.3 mm	Φ99 x 64.7 mm	Φ65 x 164 mm	Φ65 x 164 mm	Φ65 x 164 mm	Φ113 x 77.7 mm
Operating Temperature	-30 ~ 50°C	0 ~ 40°C	0 ~ 40°C	0 ~ 40°C	-30 ~ 50°C	-30 ~ 50°C	-30 ~ 50°C	-30 ~ 50°C	-30 ~ 50°C
Operating Humidity	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)	20 ~ 80% RH (non-condensing)
Optional Power Input (Power Supply Not Included)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)	DC power adapter (Input: 100-240VAC, 50/60Hz; Output: 12VDC, 1.5A)
Safety	CE (Class A), CE LVD, FCC (Class A)								
Optional Mounting Brackets	<ul style="list-style-type: none"> DCS-37-1 - Wall mount bracket DCS-37-2 - Ceiling mount bracket DCS-37-3 - Wall/ceiling tilt mount bracket with 27° tilt 	<ul style="list-style-type: none"> DCS-37-1 - Wall mount bracket DCS-37-2 - Ceiling mount bracket DCS-37-3 - Wall/ceiling tilt mount bracket with 27° tilt 	<ul style="list-style-type: none"> DCS-37-1 - Wall mount bracket DCS-37-2 - Ceiling mount bracket DCS-37-3 - Wall/ceiling tilt mount bracket with 27° tilt 		<ul style="list-style-type: none"> DCS-37-1 - Wall mount bracket DCS-37-2 - Ceiling mount bracket DCS-37-3 - Wall/ceiling tilt mount bracket with 27° tilt 				<ul style="list-style-type: none"> DCS-37-1 - Wall mount bracket DCS-37-2 - Ceiling mount bracket DCS-37-3 - Wall/ceiling tilt mount bracket with 27° tilt

*Available in October 2018



If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

- [D-Link Assist Gold - for comprehensive 24-hour support](#)
- [D-Link Assist Silver - for prompt same-day assistance](#)
- [D-Link Assist Bronze - for guaranteed response on the next business day](#)

D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed.



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2018 D-Link Corporation. All rights reserved. E&OE.

Updated August 2018

