



WIRELESS N CABLE MODEM

HIGH-SPEED INTERNET

Latest DOCSIS/EuroDOCSIS 3.0 standards provide transmission speeds of up to 320Mbps downstream, 160Mbps upstream

4 GIGABIT LAN PORTS

4 Gigabit Ethernet ports provide ultra-fast wired networking

WIRELESS-N CONNECTIVITY

Wireless-N delivers exceptional range and speed



ULTIMATE PERFORMANCE

Powered by DOCSIS/EuroDOCSIS 3.0 channel bonding bandwidth technology, the DCM-702 Wireless N Cable Modem increases download speeds by up to 8 times when compared with DOCSIS/EuroDOCSIS 2.0. This ensures optimal delivery of popular Internet applications, such as file sharing, audio and video streaming, Internet TV, and website uploading.

DOCSIS COMPATIBILITY

The DCM-702 Wireless N Cable Modem makes your broadband connection more efficient and effective by clearing network congestion, resulting in a boost in download speeds. With the DCM-702, you can get more out of your broadband connection through increased bandwidth and enhanced performance. The DCM-702 is DOCSIS/EuroDOCSIS Certified, which ensures compatibility with all DOCSIS/EuroDOCSIS compatible cable providers. The DCM-702 Wireless N Cable Modem is also backwards compatible with DOCSIS/EuroDOCSIS 2.0/1.1/1.0 standards.

INTEGRATED HOME SERVICES

The DOCSIS/EuroDOCSIS standard provides speeds fast enough to support multiple services simultaneously in your home, such as digital television and video on demand.


WHAT THIS PRODUCT DOES

The DCM-702 Wireless N Cable Modem delivers state-of-the-art performance for both home and small business networks. The DCM-702 provides wired and wireless connections for rapid data transfers, voice packets, Real Time HD media streaming, gaming and maximum Internet bandwidth. Equipped with four Gigabit Ethernet ports allowing for maximum wired speeds, this modem is an ideal solution for home or small business networking with multiple computers and network enabled devices running several applications at the same time.

GET CONNECTED, STAY CONNECTED

The DCM-702 offers Ethernet connectivity and is DOCSIS/EuroDOCSIS CableLabs certified. Connect with confidence to a certified cable Internet provider using the DCM-702 Cable Modem and enjoy a new and enhanced broadband experience.

YOUR NETWORK SETUP

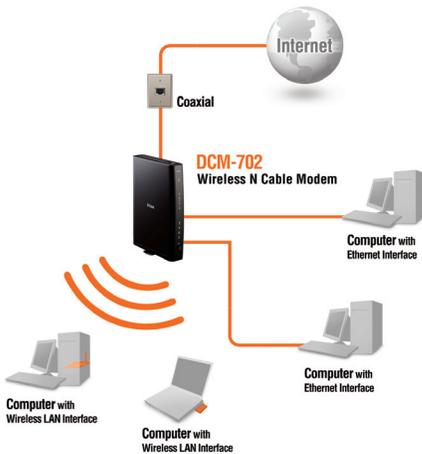

TECHNICAL SPECIFICATIONS

DEVICE INTERFACES

- LAN: Four 10/100/1000 Mbps auto-sensing MDIX, Auto Uplink RJ-45 ports
- WAN Port: Coax F Connector
- Wireless: 802.11n in 2.4 GHz band, access point auto rate capable

SYSTEM REQUIREMENTS

- 2.4 GHz wireless adapter or Ethernet adapter and cable for each computer
- DOCSIS/EuroDOCSIS 3.0 or earlier Internet service
- Microsoft Windows XP/Vista/7, Mac OS X, Linux, or another operating system running a TCP/IP network
- Microsoft® Internet Explorer 8.0, Safari, Firefox, Opera, or Chrome

STANDARDS COMPLIANCE

- DOCSIS 3.0, EuroDOCSIS 3.0, backwards compatible with CMTS based on: DOCSIS 2.0, EuroDOCSIS 2.0, DOCSIS 1.1

NETWORKING PROTOCOLS

- Application Layer
 - DHCP, DNS (Proxy & Dynamic), HTTP, RTP, SSH, TFTP, Passes UPnP
- Transport Layer
 - RSVP, TCP, TFTP, UDPv4, UDPv6
- Network Layer
 - ARP, ICMP, IGMP, IPv4, IPv6, IPv6 client/ server/relay, IPv6CP, IP fragmentation and reassembly, RIPv1, RIPv2, RIPv2c, RIPv3, NAT/PAT, RT QoS
- Data Link Layer
 - Half Bridging, Bridging, PPP, IPsec & VPN Pass-through, Static Routing, Port Forwarding, 802.1d, Spanning Tree
- Physical Layer
 - Ethernet:10BaseT/100BaseT /1000BaseT

MANAGEMENT SPECIFICATIONS

- Advanced Settings: Wireless, Port Forwarding, Port Triggering
- Event Logs, Trusted User
- Maintenance: Status, Attached Devices, Backups, Set Password, Software Upgrades
- Network Time Protocol
- RF Interface IB
- Setup: LAN, DNS, Static Routes
- Smart Setup Wizard
- Syslog
- Telnet

WI-FI FEATURES

- 802.1x
- Disable SSID broadcast
- Disable Wi-Fi Radio
- MAC address Access Control
- Multiple SSIDs
- Push 'N Connect WiFi Protected Setup™ with PIN or push button
- SID to SSID QoS mapping
- Turn Wi-Fi on or off with software
- WEP 64/128 bit
- WMM-QoS & UAPSD
- WPA2, WPA2-PSK
- WPS: Wi-Fi Protected Setup

SECURITY

- Firewall: Stateful packet inspection (SPI), intrusion logging and reporting
- DHCP client on WAN
- DMZ
- Domain & URL Filtering
- HTTPS
- IP Address Assignment: Static IP address assignment, internal DHCP server on LAN
- Mode of operation: Port and Network
- Address Translation (NAT), static routing
- NAT traversal (VPN pass-through) for IPsec, PPTP and L2TP VPNs
- Parental Control

DIMENSIONS

- 167 x 36 x 220 mm (6.6 x 1.4 x 8.7 in)

WEIGHT

- 0.31 kg (.68 lb)

FRONT PANEL LEDS

- Cable upstream & downstream
- Internet & Power
- LAN 1/2/3/4
- Wi-Fi, WPS

CERTIFICATIONS

- CE
- FCC
- UL
- C-TICK
- A-TICK

POWER

- Adapter: 12V DC, 1.5A; plug is localized to country of sale
- Input Power: 30W
- On/Off button

PACKAGE CONTENTS

- Ethernet cable
- Power supply
- CD-Rom with Manual
- Quick Installation Guide



D-Link Corporation
No. 289 Xinhu 3rd Road, Neihu, Taipei 114, Taiwan
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2010 D-Link Corporation. All rights reserved.
Release 03 (February 2010)