

## mydlink™, the Easiest Way to Keep an Eye on What Matters Most

Access live video feeds of your home or office from any internet-connected computer, iPhone, iPad, or Android device anytime and anywhere

**Night Vision** - View up to 15 feet in complete darkness

**Sound and Motion Detection** - Enhanced email alerting based on sound and motion sensing technology

**Wi-Fi Extender** - Instantly eliminate dead zones and expand your home's wireless network

**Remote Viewing** - View on iPhone®, iPad® or Android® with mydlink™ app or mydlink.com

**Wireless/Ethernet** - Secure connection for flexible placement

**Zero Configuration** - Automatic and intelligent syncs with your home's router



## DCS-933L

# Day/Night Cloud Camera

### Features

#### Multimedia

- Real-time H.264 and MJPEG compression
- Sound level detection

#### Security

- Send snapshots or video clips to your FTP site or via E-mail
- Remote video monitoring
- Record to your computer with included D-ViewCam™ software

#### Camera

- High quality VGA CMOS sensor for excellent image quality
- Built-in IR LED to capture video in low-light environments

#### Ease Of Use

- UPnP & DDNS support
- WPS support

#### Networking

- mydlink™ enabled
- Wireless 802.11n connection
- The built-in Wi-Fi extender expands your wireless signal

The cloud camera, DCS-933L is a day/night network camera that easily connects to your existing home network for remote viewing on a range of mobile devices. It features a Wi-Fi Extender to effortlessly expand your wireless coverage, night vision up to 5 metres, sound and motion detection for the ultimate in peace of mind, and H.264 video compression for a high-quality image. And with its wireless connectivity, you can place your camera almost anywhere in your to keep an eye on the things you love most.

### 24/7 Day And Night Monitoring

The DCS-933L is a standalone surveillance camera that can run without the need of a computer and requires no special hardware or software. When connected to the Internet, the DCS-933L can send e-mail notifications with snapshots or video clips whenever motion or sound is detected. You can choose areas of interest for motion detection or set the sound volume level for when you want to be alerted. Night time monitoring is possible with the built-in infrared LEDs which allow for night time viewing of up to 5 metres, enabling round-the-clock monitoring, even in complete darkness.

### mydlink™ Easy Setup

Connecting a camera to your network and accessing it has traditionally required complex configuration. mydlink™ makes it easy to access your camera from wherever you are, whenever it's convenient for you. A step-by-step guide has your camera up and running in a matter of minutes. Then via a simple website you can set up a mydlink™ account allowing you to view and manage your camera from any Internet connected computer. If you have more than one camera, you can add it to your existing mydlink™ account and watch all your cameras from a single location. Accessing your cameras on the go is easy too. Just download the free mydlink™ app for your smart phone or tablet and you can quickly and easily view and configure your camera feed from anywhere with a wireless or 4G LTE/3G connection.


**Wireless N Connectivity And Extender**

Not only can the DCS-933L connect via wireless N to your WPS-enabled router with a single press of a button, the extender mode can extend the range of your existing wireless network. This eliminates wireless dead spots to give you a more complete wireless coverage.


**Full Featured Surveillance System**

Included with the DCS-933L is the free D-ViewCam™ software. D-ViewCam™ IP camera surveillance software is a comprehensive surveillance system designed to centrally manage multiple IP cameras. Supporting up to 32 IP cameras, D-ViewCam™ is compatible with all current D-Link IP cameras and provides digital monitoring and recording of video, audio, and events for various security applications. This software provides users with a wide array of features for added convenience, including video recording and playback, Video mode, Map mode, Wizard mode, Expert mode, Event Action, and more.

**mydlink™ app**



With the mydlink™ app for iPhone, iPad and Android devices, you can quickly and easily access your camera from anywhere with a Wi-Fi or 4G LTE/3G connection.

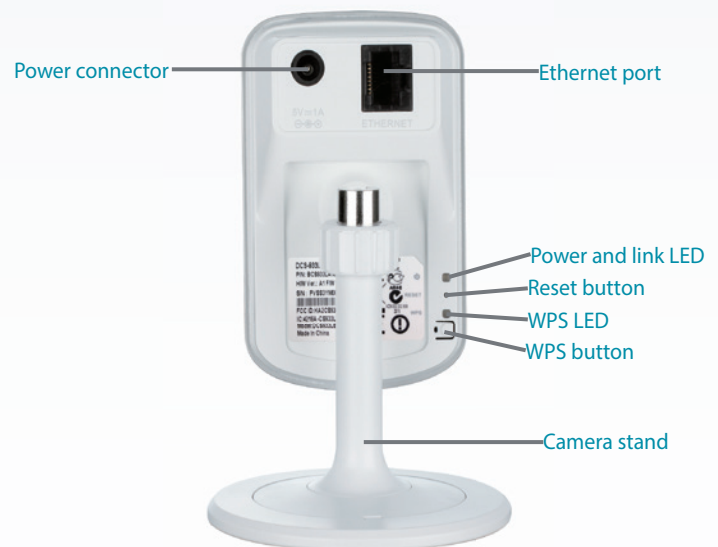

**Technical Specifications**

Camera		
Camera Hardware Profile	<ul style="list-style-type: none"> <li>• 1/5"VGA progressive CMOS sensor</li> <li>• 5 metre IR illumination distance, minimum illumination 0 lux with IR LED on</li> <li>• Built-in Infrared-Cut Removable (ICR) filter module</li> <li>• 4X digital zoom</li> <li>• Fixed length 3.15 mm</li> <li>• Aperture F2.8</li> </ul>	<ul style="list-style-type: none"> <li>• Angle of view                             <ul style="list-style-type: none"> <li>• (H) 45.3°</li> <li>• (V) 34.5°</li> <li>• (D) 54.9°</li> </ul> </li> <li>• Exposure time: 1/15~1/15,000 sec.</li> <li>• Built-in microphone</li> </ul>
Image Features	<ul style="list-style-type: none"> <li>• Configurable image size, quality, frame rate, and bit rate</li> <li>• Time stamp and text overlays</li> </ul>	<ul style="list-style-type: none"> <li>• Configurable motion detection windows</li> <li>• Configurable brightness, saturation, contrast</li> </ul>
Video Compression	<ul style="list-style-type: none"> <li>• H.264/MJPEG format compression simultaneously</li> </ul>	<ul style="list-style-type: none"> <li>• JPEG for still image</li> </ul>
Video Resolution	<ul style="list-style-type: none"> <li>• 640 x 480, 320 x 240, 160 x 112 at frame rates up to 30 fps</li> </ul>	
Audio Compression	<ul style="list-style-type: none"> <li>• PCM</li> </ul>	
Connectivity	<ul style="list-style-type: none"> <li>• 10/100 BASE-TX Ethernet port</li> </ul>	<ul style="list-style-type: none"> <li>• 802.11n wireless</li> </ul>

Network		
Network Protocols	<ul style="list-style-type: none"> <li>• IPV4, ARP, TCP, UDP, ICMP</li> <li>• DHCP client</li> <li>• NTP client (D-Link)</li> <li>• DNS client</li> <li>• DDNS client (D-Link)</li> <li>• SMTP client</li> </ul>	<ul style="list-style-type: none"> <li>• FTP client</li> <li>• HTTP server</li> <li>• PPPoE</li> <li>• UPnP port forwarding</li> <li>• LLTD</li> </ul>
Security	<ul style="list-style-type: none"> <li>• Password authentication</li> </ul>	<ul style="list-style-type: none"> <li>• HTTP digest encryption</li> </ul>
System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> <li>• Operating system: Microsoft Windows, XP, Vista, 7, 8</li> <li>• Browser: Internet Explorer, Firefox, Safari, Chrome</li> </ul>	
Event Management	<ul style="list-style-type: none"> <li>• Motion detection</li> <li>• Sound level detection</li> </ul>	<ul style="list-style-type: none"> <li>• Event notification and uploading of snapshots/video clips via SMTP or FTP</li> </ul>
Remote Management	<ul style="list-style-type: none"> <li>• Configuration accessible via web browser</li> </ul>	
Mobile support	<ul style="list-style-type: none"> <li>• mydlink™ Lite app for iOS and Android</li> </ul>	
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> <li>• Operating system: Microsoft Windows 7 / Vista / XP</li> <li>• Web Browser: Internet Explorer 7 or higher</li> </ul>	<ul style="list-style-type: none"> <li>• Protocol: standard TCP/IP</li> </ul>
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> <li>• Remote management/control of up to 32 cameras</li> <li>• Viewing of up to 32 cameras on one screen</li> <li>• Supports all management functions provided in web interface</li> </ul>	<ul style="list-style-type: none"> <li>• Scheduled motion triggered, or manual recording options</li> </ul>
General		
Dimensions, including base	<ul style="list-style-type: none"> <li>• 80 x 115 x 80 mm (3.14 inches x 4.52 inches x 3.14 inches)</li> </ul>	
Weight	<ul style="list-style-type: none"> <li>• 96.2 grams (0.21 lbs)</li> </ul>	
Power	<ul style="list-style-type: none"> <li>• 5 V DC/1 A, 50/60 Hz</li> </ul>	
Power Consumption	<ul style="list-style-type: none"> <li>• 4 W</li> </ul>	
Temperature	<ul style="list-style-type: none"> <li>• Operating: 0 to 40 °C (32 to 104 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: -20 to 70° C (-4 to 158 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Operating: 20% to 80% non-condensing</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: 20% to 80% non-condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• CE, CE LVD, FCC, C-Tick</li> </ul>	



For more information: [www.dlink.com](http://www.dlink.com)

**D-Link European Headquarters.** D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX.  
Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners. ©2013 D-Link Corporation. All rights reserved. E&OE.

Updated April 2013