

# **Product Highlights**

### **Easy Expansion**

Easily add 4 x USB 3.0 ports to any Windows and macOS computers, Chromebooks and iPad Pro. Simply plug in, no need to install additional software

### Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

#### **Fast Charge Port**

One USB 3.0 port with Quick Charge BC 1.2 support allows you to charge devices faster



## **DUB-2340**

# USB-C to 4-Port USB 3.0 Hub with Power Delivery


### **Features**

### **Versatile and Convenient**

- Four USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 port supports Quick Charge BC 1.2
- • One USB 3.0 Type-C port with power delivery of up to 60 W (20 V @ 3 A) $^4$
- Simply plug-and-play, no software required
- Compact design
- Compatible with Windows and macOS computers, Chromebooks and iPad Pro

The DUB-2340 USB-C to 4-Port USB 3.0 Hub with Power Delivery instantly adds four USB 3.0 ports, including one with support for Quick Charge BC 1.2 and a USB-C port with charging ability to your Windows and macOS computers, Chromebooks and iPad Pro. Just plug the DUB-2340 into an available USB-C port, and you're ready to connect up to four USB devices and charge your device faster.

### **Hardware Overview**

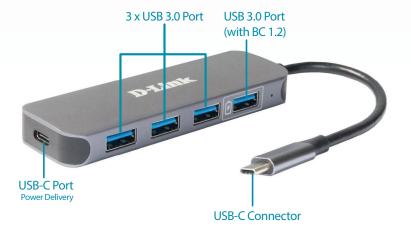

# DUB-2340 USB-C to 4-Port USB 3.0 Hub with Power Delivery

Technical Specifications		
Connectivity		
Interfaces	<ul> <li>One USB Type-C connector</li> <li>Three USB 3.0 Type-A ports</li> <li>One USB 3.0 Type-A port with Fast Charge mode support</li> <li>One USB Type-C/PD 3.0 port</li> </ul>	
LEDs	Power (per device)     Solid green - power is on	
General		
Standards	• USB 3.0 • USB 2.0 • USB 1.1	
Data rate	• Up to 5 Gbps	
System requirements	Available USB Type-C port	<ul> <li>Windows 7/8/8.1/10, macOS (OS X 10.8 and above)</li> <li>Chromebook, iPad Pro</li> </ul>
Physical		
Dimensions (W x H x D)	• 118 x 35 x 13 mm	
Weight	• 70 g	
Power	From computer (USB bus powered)	
Supplied charging voltage/current	<ul> <li>20 V / 3 A (PD 3.0)</li> <li>Max. 1.5 A for Battery Charging 1.2 compliant pc</li> <li>0.5 A for standard ports</li> </ul>	ort
Temperature	• Operating: 0 to 45 °C	• Storage: -10 to 70 °C
Humidity	Operating: up to 85% non-condensing	Storage: up to 85% non-condensing
Certifications	• CE	

 $<sup>^{\</sup>rm 1}$  Please make sure that the USB Type-C port of your laptop supports PD 3.0.





