

Product Highlights

True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your device

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0, at up to 5 Gbps

Full-Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag.



DUB-M520 5-in-1 USB-C Hub with HDMI/Ethernet/Power Delivery

Features

Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection with auto-negotiation to always use the highest available speed

HDMI Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible


USB Type-C with Simple Installation

- Two USB 3.0 SuperSpeed 5 Gbps ports One USB 3.0 Type-C charging port with power
- delivery of up to 60 W (20 V @ 3 A)
- Backwards compatible with USB 2.0 and USB 1.1 devices
- Simply plug it in and you're ready to go
- No additional hardware or software installation required

Sturdy Aluminium Casing

Strong aluminium alloy casing

The DUB-M520 5-in-1 USB-C Hub with HDMI/Ethernet/Power Delivery allows you to instantly add Gigabit Ethernet connectivity, a second display, and two additional USB 3.0 ports to your ultraportable computer. Just plug the DUB-M520 into an available USB Type-C port and you're ready to connect to the Internet with the reliability of a wired connection. You can also connect up to 2 more USB devices, as well as connect a second display, assuring that you don't have to solely rely on laggy wireless video streaming as an option to show things on a larger screen.

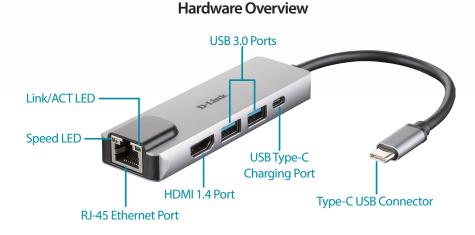

Technical Specifications

Connectivity		
Device Interfaces	 RJ-45 Ethernet Port (10/100/1000 Mbps) Two USB 3.0 Type-A (female) Ports HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz) 	 One USB 3.0 Type-C charging port with power delivery of up to 60 W (20 V @ 3 A) USB Type-C Connector (Thunderbolt 3 compliant)
LEDs	Speed (amber)	• Link/ACT (green)
Standards	 OHCI (Open Host Controller Interface) EHCI (Enhanced Host Controller Interface) IEEE 802.3 Ethernet IEEE 802.3 at Ethernet IEEE 802.3 ab Gigabit Ethernet IEEE 802.3 Full Duplex and Half Duplex IEEE 802.3 az Wake-On-LAN Support 	 USB Specification Version 3.0 USB Specification Version 2.0 USB Specification Version 1.1 HDMI 1.4 HDCP 2.2 DisplayPort Alternate Mode
General		
Minimum System Requirements	Computer running Microsoft Windows, Mac OS, or Chrome OS	 A USB Type-C Port with DisplayPort Alternate Mode Supported
Physical		
Dimensions (W x H x D)	• 103 x 31 x 11 mm (4.06 x 1.22 x 0.43 in)	• Cable length: 17 cm (6.69 in)
Weight	• 49.0 g (1.73 oz)	
Power	Input: Bus-powered	• Consumption: 120 mA, 5 V DC
Temperature	• Operating: 0 to 70 °C (32 to 158 °F)	• Storage: -25 to 85 °C (-13 to 185 °F)
Humidity	• Operating: 5% to 80% RH, non-condensing	Storage: 5% to 80% RH, non-condensing
Certifications	• CE • FCC	• IC • RCM



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

