

Product Highlights

All-In-One Fever Screening Solution

Complete kit that includes thermographic camera with intelligent temperature detection, blackbody calibrator and management software

Simultaneous Multiple People Detection

Screen up to 45 people at the same time with a rapid response time of less than 30 ms and accuracy within 0.3°C

Flexible Integration and Installation

ONVIF compatible allows for easy integration, while PoE support gives additional flexibility on where the camera can be installed



DCS-9500T

Group Temperature Screening Camera

Features

High-accuracy Thermal Camera

- 400 (H) x 300 (V) effective pixels
- Thermal sensitivity up to 40 mK @F1.0
- Boasting a f8 mm @F1.0 thermal camera
- A thermal camera angle of view of H:46° x V:35°

Temperature Detection

- Detect and measure up to 45 faces at the same time
- 2 x digital temperature alarms
- Response times less than 30 ms

Exceptional Visible Video Quality

- 1/2.8" 2-megapixel progressive CMOS sensor
- f2.7 mm to f12 mm motorised lens with an aperture of F1.6 ~F2.9
- H:105°~32° visible camera angle of view
- True Wide Dynamic Range (WDR)
- H.265, H.264, MJPEG

Closed Network Temperature Monitoring

- Free CMS software included with temperature monitoring, high-temperature voice alarms⁶ and face mask/covering detection.

The DCS-9500T Group Temperature Screening Camera is an all-in-one fever screening solution, ideal for busy entrances at schools, hospitals, transportation hubs and offices buildings. It provides fast and accurate skin-surface temperature detection¹ for up to 45 individuals simultaneously with a $\pm 0.3^{\circ}\text{C}$ accuracy, so that you can be notified instantaneously to intercept and take appropriate action. The rapid response time of under 30ms allows the camera to detect feverish people with elevated skin temperature quickly and precisely even in flowing crowds. The DCS-9500T can also identify individuals through facial recognition (against a pre-loaded facial image identification database)².

The wide-angle thermal lens means you can monitor a wider area, and the uncooled IRFPA microbolometer high-resolution thermal sensor allows for sharper thermal imaging. The kit comes with a blackbody calibrator that enables the system to calibrate in real-time to ensure constant accuracy.

The DCS-9500T features dual-lens technology, with concurrent thermal and optical imaging. Together they create exceptional high-quality footage that can be overlaid onto each other, offering the best of both lens' features unified into one image. The resulting footage can be viewed in 17 different modes/colour palettes.

PoE support allows the camera to be powered and connected through a single cable, giving additional deployment flexibility, especially at locations where a power socket is not available.

DCS-9500T includes



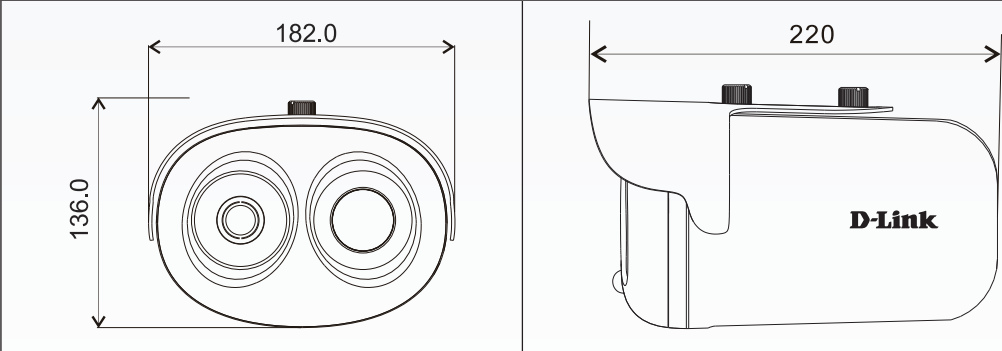


1 x Thermographic Camera, 1 x Blackbody Calibrator, 2 x Wallmount Bracket

Technical Specifications

Camera

Thermal Camera Hardware	<ul style="list-style-type: none"> Image sensor: Uncooled IRFPA Microbolometer Effective pixel: 400 (H) x 300 (V) Pixel Size: 17 um Thermal Sensitivity ≤ 40 mk @ F1.0 Spectral Range: 8 ~14 um Focal length: f8 mm 	<ul style="list-style-type: none"> Aperture: F1.0 Angle of view: <ul style="list-style-type: none"> (H) 46° (V) 35° Color Palettes: Black-Heat/White-Heat/Raindow/Iron-Red up to 17 modes
Visible Camera Hardware Profile	<ul style="list-style-type: none"> 1/2.8" Sony progressive CMOS sensor Minimum illumination: 0.15 lux/ F2.0 (color) Motorized length: f2.7~f12 mm Aperature: F1.6~F2.9 mm 	<ul style="list-style-type: none"> Adjustable angle of view (motorized lens): Horizontal: 105°~32° Minimum object distance: 0.5 m
Camera Housing	<ul style="list-style-type: none"> IP66-compliant weatherproof housing 	
Image Features	<ul style="list-style-type: none"> Time stamp and text overlays Configurable motion detection windows Configurable privacy mask zones Configurable shutter speed, brightness, saturation, contrast, and sharpness 	<ul style="list-style-type: none"> WDR / HLC / BLC Anti-shake Defog 2DNR/3DNR
Temperature Detection ⁴	<ul style="list-style-type: none"> Detection Target: Max 45 People Temperature Alarm: Over temperature alarm 	<ul style="list-style-type: none"> Accuracy: 0.3° C Detection distance: 3~5 m (recommended 4 m)
Video Compression	<ul style="list-style-type: none"> Simultaneous H.265/H.264/MJPEG encoder compression 	
Video Resolution	<ul style="list-style-type: none"> Visible camera: 1920 x 1080, 1280 x 720 up to 30 fps 	<ul style="list-style-type: none"> Thermal camera: D1 up to 30 fps
External Device Interface	<ul style="list-style-type: none"> 10/100BASE-TX Fast Ethernet port 	<ul style="list-style-type: none"> Supports 802.3af PoE Class 3
Network		
Network Protocols	<ul style="list-style-type: none"> IPv6 IPv4 TCP/IP UDP 	<ul style="list-style-type: none"> DHCP client HTTP/HTTPS RTP / RTSP/ RTCP ONVIF-compliant

DCS-9500T Group Temperature Screening Camera

System Management	
Event Management	<ul style="list-style-type: none"> • Motion detection • Temperature detection • Face mask/covering detection <ul style="list-style-type: none"> • Facial Recognition² • I/O alarm
System Requirements for Web Interface	<ul style="list-style-type: none"> • Windows 10 / 8 / 7 • Internet Explorer 11
System Requirements for CMS	<ul style="list-style-type: none"> • Microsoft® Windows® 10 Pro (64 bit) / Microsoft® Windows® 10 Enterprise (64 bit)
General	
Weight	<ul style="list-style-type: none"> • 9.5 kg (20.9 lbs)⁵
Power Consumption	<ul style="list-style-type: none"> • Max 10 W
Temperature	<ul style="list-style-type: none"> • Operating: -30 to 60 °C (-22 to 140 °F) • Storage: -20 to 70 °C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: Max 90 % non-condensing • Storage: Max 90 % non-condensing
Bracket	<ul style="list-style-type: none"> • 2 x wall mounts for camera and blackbody calibrator
Certifications	<ul style="list-style-type: none"> • CE • CE LVD • FCC
Dimensions	
Order Information	
NVR ³	<ul style="list-style-type: none"> • DNR-2020-04P - JustConnect 16-Channel PoE Network Video Recorder 
Mounting Bracket	<ul style="list-style-type: none"> • DCS-9500T-1 - Ceiling Mount Bracket (690 x 85 x 85 mm, 1 kg) 

¹ The DCS-9500T is designed for the rapid detection of skin-surface temperatures for preliminary public area screening. It does not measure actual core body temperatures which should be further confirmed using clinical measurement devices. Always check your local laws and regulations deployment and usage of this type of equipment.

² Facial recognition function requires preloaded facial image identification database that may be subject to consensus from recognised individuals. The end-user assumes all liability for compliance with applicable local laws.

³ Use of audio or video equipment for recording the image or audio of a person without their knowledge and consent is prohibited in certain countries or jurisdictions. The end-user assumes all liability for compliance with applicable local laws.

⁴ Avoid wind, sunshine, and high-temperature object reflections in the background for most accurate results. Indoor installation is highly recommended.

⁵ Weight includes camera, black body calibrator and 2 mounts.

⁶ Intranet camera in a closed network is highly recommend.



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2020 D-Link Corporation. All rights reserved. E&OE.

Updated May 2020

D-Link®