

Product Highlights

Compact Size and Easy Deployment

Ultra small size and PoE support allow for easy deployment in hard-to-reach places or areas where discrete surveillance is needed.

HD Image Quality and Detail with Night Vision

High-resolution 1 megapixel sensor provides a 1280 x 800 resolution image to monitor a large area with excellent detail. Night vision with built-in infrared illuminator allows you to monitor 24 hours a day

mydlink™-enabled Cloud Access

Easy setup, management and remote viewing your camera through the free mydlink™ app on your mobile device or via the secure mydlink™ web portal



DCS-6004L

HD PoE Mini Dome Cloud Camera

Features

Camera

- 1/4" 1 megapixel CMOS progressive sensor
- 10x digital zoom and 5m IR illumination
- Built-in microphone and audio out for 2-way communication
- ONVIF compliant

Connections

- 10/100 Power over Ethernet port
- Micro SD/SDHC card slot for onboard storage²

Image & Video

- High resolution (1280x800 max)
- H.264, MPEG-4 and Motion JPEG compression
- ePTZ viewing
- Simultaneous multi-stream support
- Supports multiple access lists
- Built-in Samba client for saving to a server

The DCS-6004L HD PoE Mini Dome Cloud Camera is a mydlink™-enabled video surveillance camera built with an ultra-small form factor that features Power over Ethernet connectivity, making it ideal for monitoring areas that are hard to reach or require discrete surveillance.

Built for Versatility

The DCS-6004L comes with a wealth of features that enhance its surveillance capabilities, making it ideal for any situation. The ultra-small form factor and the interchangeable black/white exterior casing allows you to mount the camera in areas that need to be monitored without the camera being easily spotted. The DCS-6004L is perfect for deployment into areas that lack power outlets with its PoE feature. A built-in microphone and audio out allow for 2-way communication when motion or sound is detected.

Peace of Mind with 24/7 Monitoring of Any Environment

The DCS-6004L is a standalone surveillance camera that requires no special hardware or software, and can run independently even without a PC. Send e-mail notifications with snapshots or video clips whenever motion or sound is detected using just the DCS-6004L and an internet connection. You can customise areas of interest to monitor for motion to keep watch over entryways, and you can set volume limits to detect when a loud sound is picked up by the camera. Night time monitoring is possible with the built-in infrared LEDs which allow for night vision of up to 5 metres, enabling round-the-clock monitoring of a home or small office.

mydlink™: the easiest way to setup up your camera and monitor your home

Connecting a camera on your network and accessing it has traditionally required complex configuration. mydlink™ makes it easy to access your camera from wherever you are, whenever it's convenient for you. Using the free mydlink™ Lite app for iOS and Android smartphones and tablets, you can connect and setup your mydlink™ camera without turning on a computer. A step-by-step guide has your camera up and running in a matter of minutes. Through the mydlink™ Lite app, you can set up a free mydlink™ account which allows you to view and manage your camera from any Internet connected computer. If you have more than one camera, you can add it to your existing mydlink™ account and watch all your cameras from a single location.

Accessing your cameras on the go is easy too. Just download the free mydlink™ Lite app for your iPhone or Android device and you can quickly and easily view your camera feed from anywhere with a wireless or 3G/4G LTE connection. You can even access videos recorded onto a microSD card² and

talk back through the app with 2-way audio support. Thanks to this app, you can monitor on-the-go even if you don't have access to a computer.

If you have a mydlink™-enabled Cloud Router, setting up and configuring your DCS-6004L is a snap, thanks to Zero Configuration. Simply connect your camera to its power adapter and then connect your camera to your Cloud Router with an Ethernet cable - the camera will automatically be added to your account.

A Complete, Expandable Surveillance Solution

The DCS-6004L is a self-sufficient surveillance solution, capable of recording snapshots and video to a MicroSD card² without requiring a PC or network storage device.

If you want to expand your surveillance options, D-ViewCam™ management software is also included, giving you the ability to manage up to 32 cameras with a robust set of features, including multi-camera views and automated e-mail alerts to keep you informed of suspicious or unusual activities.

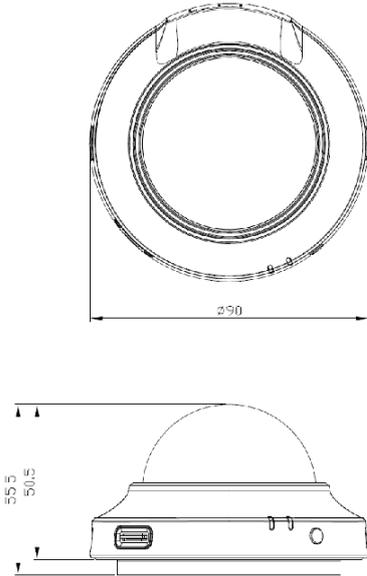
Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/4" 1 megapixel progressive CMOS sensor • Minimum illumination: 0 lux (with IR LED on) • Built-in microphone and audio out • 10x digital zoom • Fixed length: 2.8 mm • Aperture: F1.8 	<ul style="list-style-type: none"> • Angle of view: <ul style="list-style-type: none"> • (H) 75.2° • (V) 48.2° • (D) 89.3° • Minimum object distance: 500 mm
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays • Configurable privacy masks zones 	<ul style="list-style-type: none"> • Configurable brightness, saturation, contrast, and sharpness • Configurable motion detection windows
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/MPEG-4/MJPEG format compression • H.264/MPEG-4 multicast streaming 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • 16:9 -1280 x 800, 1280 x 720, 800 x 450, 640 x 360, 480 x 270, 320 x 176 up to 30 fps recording¹ 	<ul style="list-style-type: none"> • 4:3 -1024 x 768, 800 x 600, 640 x 480, 480 x 360, 320 x 240 up to 30 fps recording¹
Audio Support	<ul style="list-style-type: none"> • G.711: 64 kbps 	<ul style="list-style-type: none"> • AAC: 64 kbps
External Device Interfaces	<ul style="list-style-type: none"> • 10/100 BASE-TX Fast Ethernet port 	<ul style="list-style-type: none"> • microSD/SDHC card slot²

Network

Network Protocols	<ul style="list-style-type: none"> • IPv6 • IPv4 • TCP/IP • UDP • ICMP • DHCP client • NTP client (D-Link) • DNS client • DDNS client (D-Link) • SMTP client • FTP client 	<ul style="list-style-type: none"> • HTTP / HTTPS • Samba client • PPPoE • UPnP port forwarding • RTP / RTSP / RTCP • IP filtering • QoS • CoS • Multicast • IGMP • ONVIF compliant
Security	<ul style="list-style-type: none"> • Administrator and user group protection • Password authentication 	<ul style="list-style-type: none"> • HTTP and RTSP authentication

System Management	
System Requirements for Web Interface	<ul style="list-style-type: none"> Browsers: Internet Explorer, Firefox, Chrome
Event Management	<ul style="list-style-type: none"> Motion/sound detection Event notification and uploading of snapshots & video clips via e-mail or FTP Supports multiple SMTP and FTP servers Multiple event notifications Multiple recording methods for easy backup
Remote Management	<ul style="list-style-type: none"> Take snapshots/video clips and save to local hard drive via web browser Configuration interface accessible via web browser
Mobile Support	<ul style="list-style-type: none"> mydlink™ Lite mobile app for iPhone, iPad, Android and Windows mobile devices mydlink™+ mobile app for iPhone, iPad and Android mobile devices
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> Operating System: Microsoft Windows 8 / 7 / Vista / XP Web browser: Internet Explorer 7 or higher Protocol: Standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen Supports all management functions in web interface Scheduled motion triggered, or manual recording options
Physical	
Weight	<ul style="list-style-type: none"> Device: 130g (4.58 ounces) without Stand
External Power Adapter	<ul style="list-style-type: none"> Input: 100 to 240 V AC, 50/60 Hz Output: 5 V DC, 1.2 A
Power Consumption	<ul style="list-style-type: none"> 3.5 W
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) Storage: -20 to 70 °C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> Operating: 20% to 80% non-condensing Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> CE CE LVD FCC Class B C-Tick
Dimensions	 <p>The technical drawings show the camera's dimensions. The top view is a circle with a diameter of 70 mm. The side view shows a height of 50.5 mm and a depth of 35.5 mm.</p>

DCS-6004L HD PoE Mini Dome Cloud Camera

Included Accessories



Black Exterior Casing



White Exterior Casing

¹ Frame rates when streaming video may vary depending on network conditions and method used.

² SD card not included. A SDHC Class 6 card or above is recommended. Supports card capacities up to 32GB.



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX.
Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners. ©2014 D-Link Corporation. All rights reserved. E&OE.

Updated May 2014

D-Link[®]
Building Networks for People