

Product Highlights

Auto Discovery & Auto Configuration

Plug & Play makes adding IP cameras quick and easy, without the need for complicated setup

Up to Eight Channel PoE

PoE removes the need for additional power adaptors, providing power and network connectivity to your camera through a single cable¹

No Computers Needed

Standalone solution with direct control on the NVR and dual monitor support



DNR-2060-08P

JustConnect Multifunctional Network Video Recorder

Features

Advanced Functions

- Supports up to eight Full HD channels
- User-friendly simultaneous live view, recording and precision playback with step/fast forward/rewind
- Live monitoring with full-screen, snapshot and pan/tilt/zoom control
- Search by calendar, event, date, time, and text
- Auto discovery for effortless network camera setup and management
- Camera dual streaming
- Six 3.5" drive bays for up to 18TB of storage
- Per channel recording configuration

Connections

- DHCP client or static IP
- eSATA storage port for convenient video export
- Auto-MDIX Gigabit Ethernet LAN
- Supports multilingual GUI
- Three USB 2.0 ports
- Eight 802.3at compliant PoE+ Ethernet ports

Image & Video

- View real-time video from all 8 cameras anywhere, anytime
- Full HD Local display for perimeter deployment
- H.264/MJPEG recording and playback for BL/MP/HP profiles

The DNR-2060-08P JustConnect Multifunctional Network Video Recorder is a comprehensive standalone network video display, storage, and management solution providing reliable high-quality monitoring for IP-based security systems. The DNR-2060-08P enables simultaneous recording and remote access to recorded videos as well as live view. Controlling the DNR-2060-08P is exceptionally easy using conventional front panel controls, or with an optional keypad and mouse, or remote control handset. The highly flexible, simple-to-configure, and manage make the DNR-2060-08P a cost-effective upgrade addition to your security and surveillance infrastructure.

Maximising the potential

The latest multi-megapixel resolution cameras demand a new generation of network recording solutions. The DNR-2060-08P exceeds these demands and adds reliability, scalability, flexibility, ease of use and competitive pricing.

Robust Management Software


The standalone DNR-2060-08P includes a complete surveillance software package that enables you to view, manage, store, record, and search through footage from up to eight cameras in a central location, without the need of a computer. Recordings and e-mail alerts can be triggered through motion detection or events triggered by digital input devices, keeping administrators informed of any unusual activity.

Connectivity


The DNR-2060-08P has eight built-in 802.3at compliant PoE+ ports that simplifies camera installation by providing both power and network connectivity through a simple cable. Not only does this save overall installation cost by eliminating the need to install separate electrical wiring and power outlet, PoE+ allows you to power even the most demanding cameras. In addition, the included digital input and output connector enables further integration to external devices such as switches and alarm relays.

JustConnect Multifunctional Network Video Recorder

Front Panel

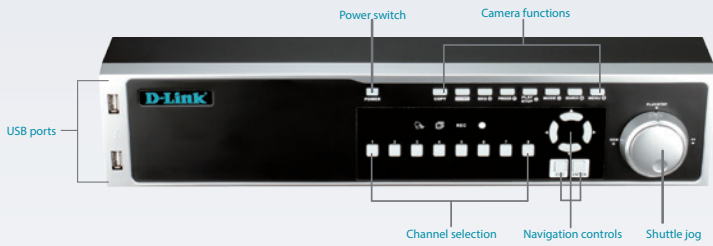

Rear Panel

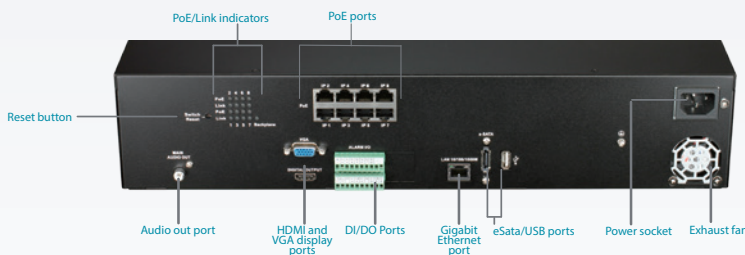

D-Link Assist

Rapid Response Support

If the worst should happen to your network you need the very best support and fast. Downtime costs your business money. D-Link Assist maximises your uptime by solving technical problems quickly and effectively. Our highly trained technicians are on standby around the clock, ensuring that award-winning support is only a phone call away.

With a choice of three affordable service offerings covering all D-Link business products, you can select the package that suits you best:

D-Link Assist Gold - for comprehensive 24-hour support

D-Link Assist Gold is perfect for mission-critical environments where maximum uptime is a high priority. It guarantees four hour around-the-clock response. Cover applies 24/7 for every day of the year including holidays.

D-Link Assist Silver - for prompt same-day assistance

D-Link Assist Silver is designed for 'high availability' businesses that require rapid response within regular working hours. It provides a four hour response service Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist Bronze - for guaranteed response on the next business day

D-Link Assist Bronze is a highly cost-effective support solution for less critical environments. Response is guaranteed within eight business hours Monday to Friday from 8am to 5pm, excluding holidays.

D-Link Assist can be purchased together with any D-Link business product. So whether you're buying switching, wireless, storage, security or IP Surveillance equipment from D-Link, your peace of mind is guaranteed. D-Link Assist also offers installation and configuration services to get your new hardware working quickly and correctly.

JustConnect Multifunctional Network Video Recorder

Technical Specifications

Recording

Video codec	<ul style="list-style-type: none"> • H.264 	<ul style="list-style-type: none"> • MJPEG
Audio codec	<ul style="list-style-type: none"> • PCM • G.711 	<ul style="list-style-type: none"> • ADPCM
Recording modes	<ul style="list-style-type: none"> • Continuous • Schedule 	<ul style="list-style-type: none"> • Event (motion, alarm, video loss)
Recording performance	<ul style="list-style-type: none"> • Up to eight channels • NTSC: 240pps at 1080P, 720P, 480P (camera dependent) 	<ul style="list-style-type: none"> • Pal: 200pps at 1080P, 720P, 480P (camera dependent)
Pre-alarm/post-alarm	<ul style="list-style-type: none"> • 0 to 70 seconds 	

Playback

Playback	<ul style="list-style-type: none"> • NTSC: 60pps at 1080P, 120pps at 720P, 240pps at 480P (camera dependent) 	<ul style="list-style-type: none"> • PAL: 50pps at 1080P, 100pps at 720P & 200pps at 480P (camera dependent)
Playback search	<ul style="list-style-type: none"> • Forward, reverse, step-by-step and different speed play/ calendar, event & panorama 	<ul style="list-style-type: none"> • Front panel/keyboard and mouse via USB port/remote control handset
Playback control	<ul style="list-style-type: none"> • Play, pause, stop, reverse, play next, previous frame, next, previous video file, speed control 	
Playback features	<ul style="list-style-type: none"> • Full screen display, video snapshot, digital zoom 	

Local Display

Video output	<ul style="list-style-type: none"> • 1080 x 1920, 1280 x 1024, 1280 x 720, 1024 x 768
Display mode	<ul style="list-style-type: none"> • 1/4/8 channels display

Backup and Export

Video Backup	<ul style="list-style-type: none"> • External USB storage 	<ul style="list-style-type: none"> • eSata storage
NAS	<ul style="list-style-type: none"> • Export to NAS 	
Export Formats	<ul style="list-style-type: none"> • AVI/RAW/DRV³ 	
Configuration	<ul style="list-style-type: none"> • Export configuration to USB 	
External Device Interface	<ul style="list-style-type: none"> • RJ45 port (auto MDI/MDIX) Gigabit LAN • Eight RJ45 port with PoE+ (IEEE 802.3at) • VGA • HDMI 	<ul style="list-style-type: none"> • DC-in jack • eSATA • Eight DI/DO • Audio out


Security

Rights management	<ul style="list-style-type: none"> • Multiple monitoring and playback account levels
Automatic log off	<ul style="list-style-type: none"> • Idle user timeout on configuration pages
User management	<ul style="list-style-type: none"> • Administrator/user group password authentication

Network

Ports	<ul style="list-style-type: none"> • Eight 10/100 TX IEEE 802.3at PoE+ Ethernet 	<ul style="list-style-type: none"> • Auto MDIX RJ-45 Gigabit Ethernet LAN
Network protocols	<ul style="list-style-type: none"> • IPV4, ARP, TCP, UDP, ICMP • DHCP client • DNS client • SMTP client (SSMTP support) 	<ul style="list-style-type: none"> • HTTP server • PPPoE • RTP • RTSP

JustConnect Multifunctional Network Video Recorder

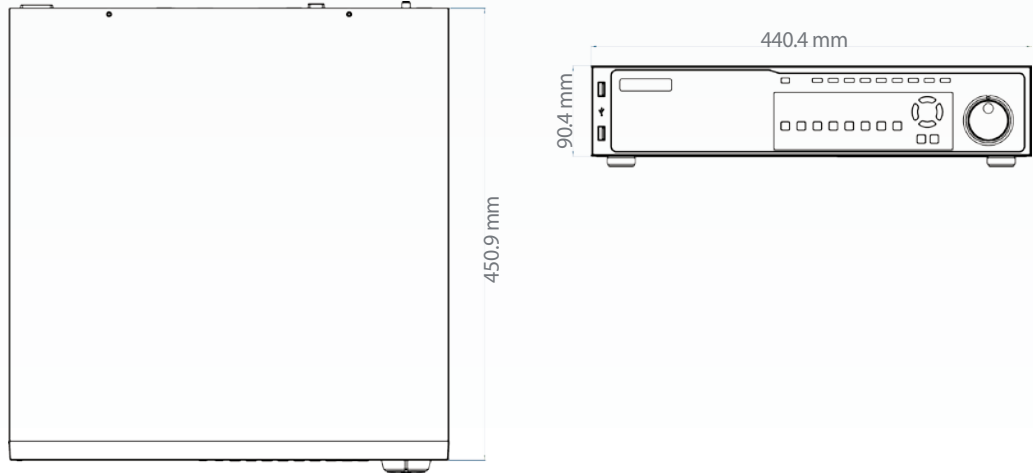System Management		
Remote management	<ul style="list-style-type: none"> Take snapshots/video clips via web browser 	<ul style="list-style-type: none"> Configuration interface accessible via web browser
Event management	<ul style="list-style-type: none"> Motion detection Event notification and upload snapshots/video clips via SMTP or FTP 	<ul style="list-style-type: none"> Multiple SMTP servers. Multiple event notification
System log	<ul style="list-style-type: none"> Status of active users and logon history 	
Mobile support	<ul style="list-style-type: none"> iOS devices 	
General		
Built-in storage interfaces	<ul style="list-style-type: none"> Six 3.5" SATA I/II bays 	<ul style="list-style-type: none"> eSata port
System requirements	<ul style="list-style-type: none"> Operating System: Microsoft Windows 7/Vista/XP 	<ul style="list-style-type: none"> Web Browser: Internet Explorer 7 or higher
Certifications	<ul style="list-style-type: none"> CE CE LVD 	<ul style="list-style-type: none"> FCC C-Tick
Physical		
Weight	<ul style="list-style-type: none"> 9.02 kg (19,9 lbs) 	
Power	<ul style="list-style-type: none"> Input: 100 to 240 VAC at 50/60 Hz Maximum consumption up to 200 Watts 	<ul style="list-style-type: none"> Output: 5 VDC, 750 mA (via USB port)
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40°C (32 to 104°F) 	<ul style="list-style-type: none"> Storage: -20 to 70°C (-4 to 158°F)
Humidity	<ul style="list-style-type: none"> Operating: 10% to 90% non-condensing 	<ul style="list-style-type: none"> Storage: 5% to 95% non-condensing
Dimensions	 <ul style="list-style-type: none"> (H) 90.4 mm (3.56 inches) (W) 440.4 mm (17.34 inches) (D) 450.9 mm (17.75 inches) 	

¹ IP camera must support 802.3af PoE or 802.3at PoE+

² Maximum frame rate for MJPEG recording at standard quality: 1080P @ 10 fps, 720P @ 15 fps

³ DRV is a compressed video format. See user manual for further details.



For more information: www.dlink.com