




MODEM ROUTER DSL-2750B


- INSTALLAZIONE TRAMITE BROWSER WEB
- ATTIVAZIONE SICUREZZA DELLA RETE WIRELESS



INTERFACCIA HARDWARE

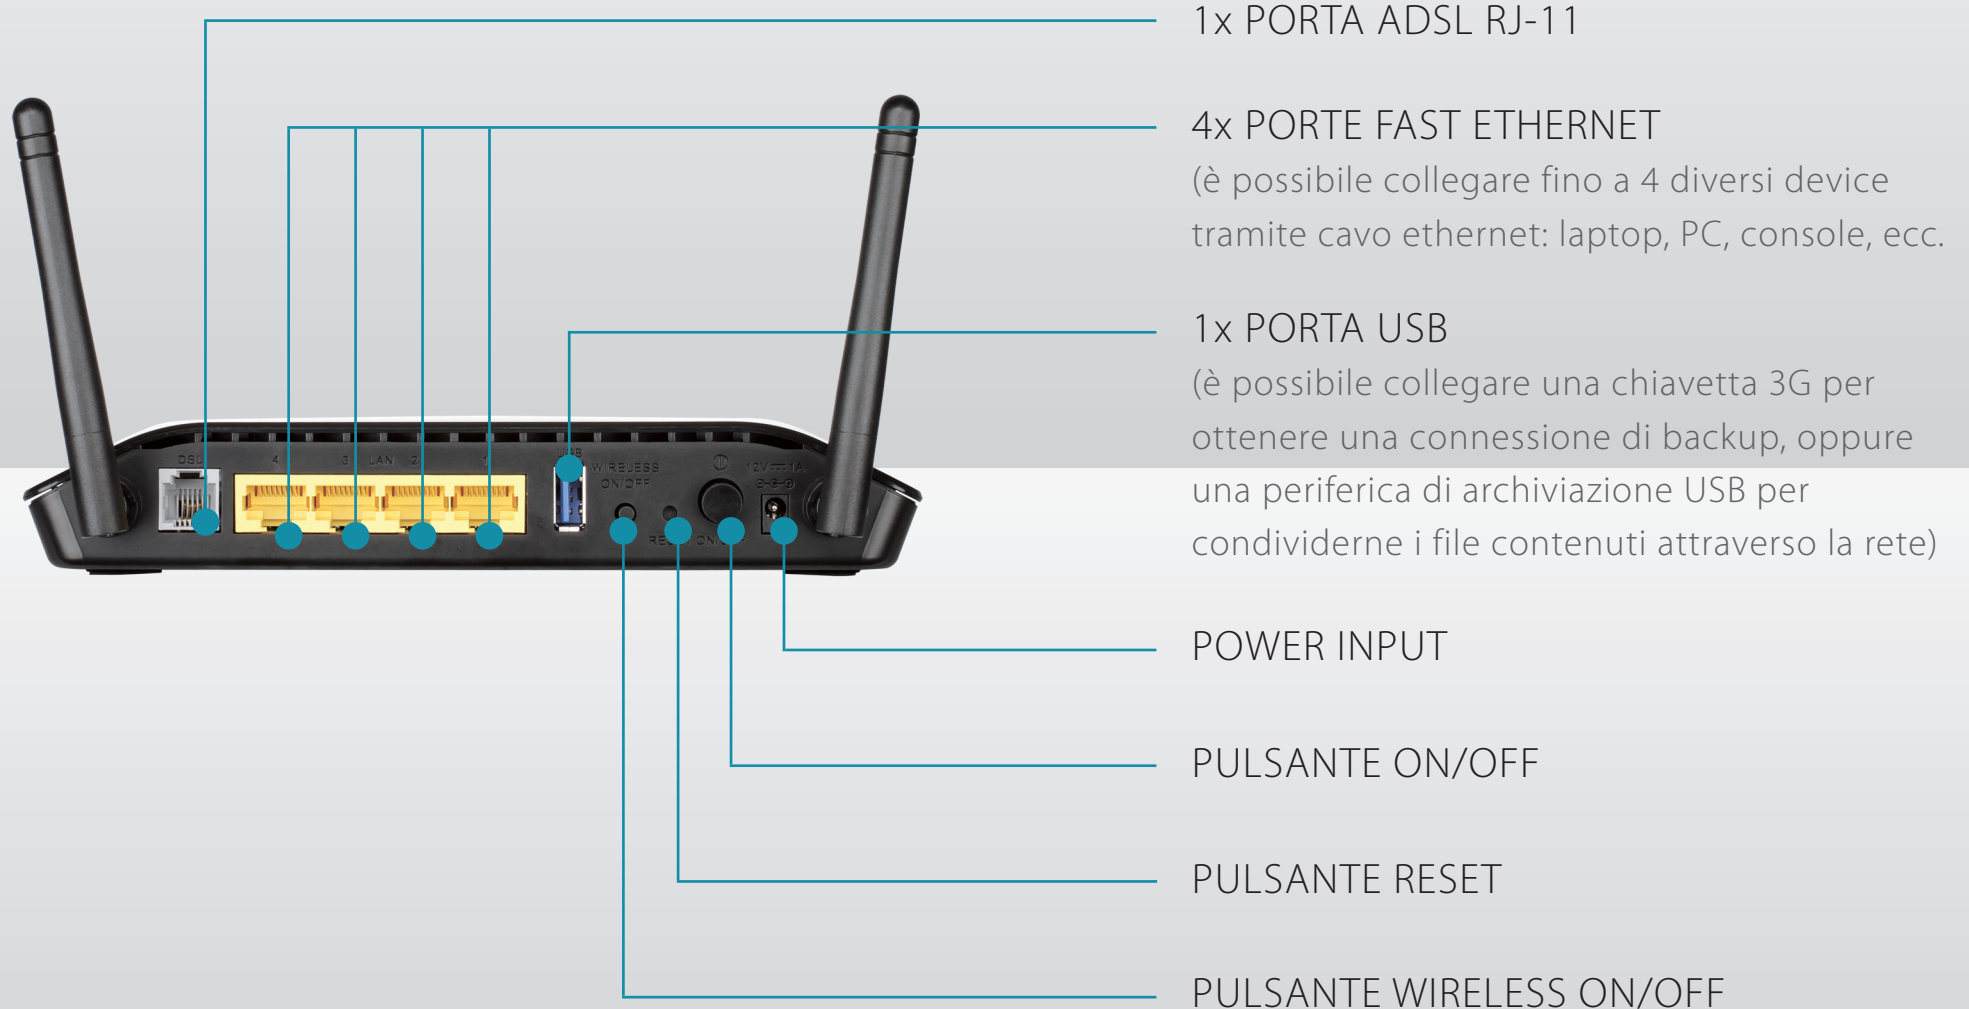

PRIMA DELL'INSTALLAZIONE COLLEGA IL ROUTER

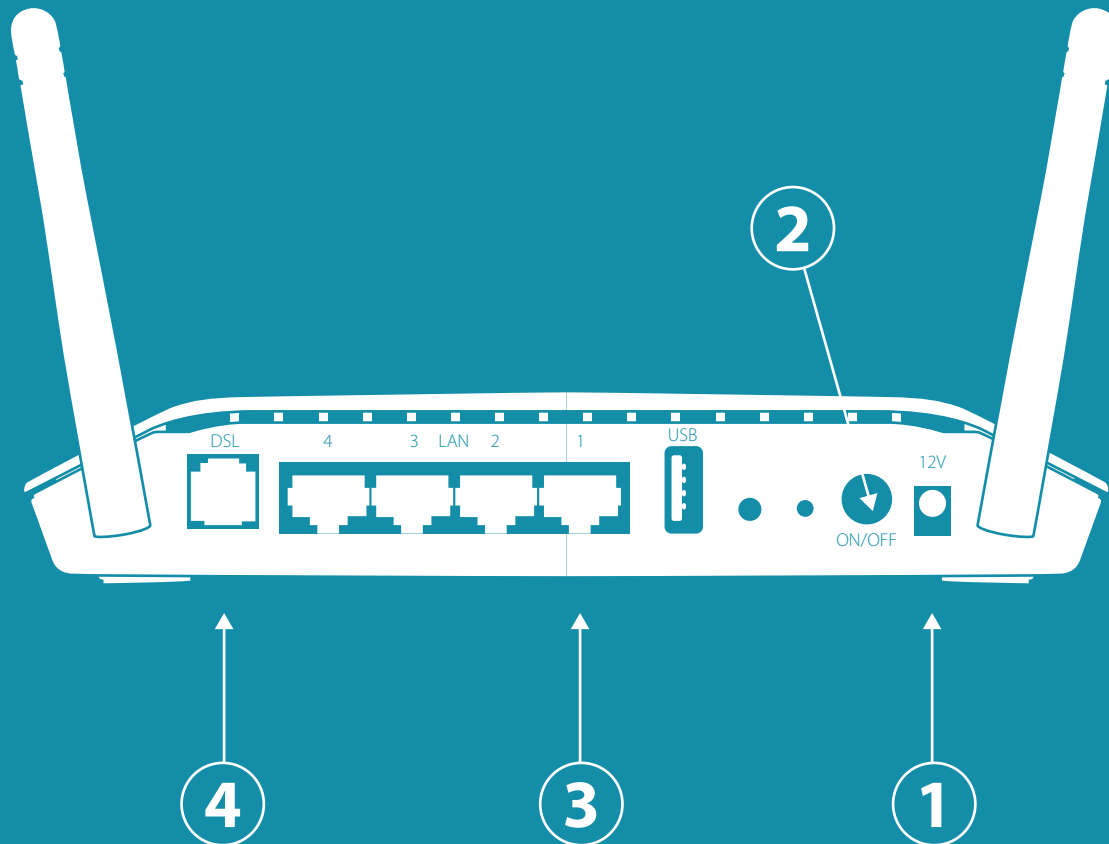

1) Collega un'estremità del cavo di alimentazione alla presa posta sul retro del router, e l'altra estremità alla presa elettrica.

2) Attiva l'interruttore di accensione posto sul retro e verificare che il LED di alimentazione si accenda.


3) Collega il cavo Ethernet (di colore blu) alla porta LAN numero 1 sul retro del router. Collega l'altra estremità alla porta LAN del computer.

4) Collega il cavo telefonico (di colore grigio) alla porta DSL sul retro del router. Collega l'altra estremità allo spinotto telefonico montato a parete.

INSTALLAZIONE AVANZATA TRAMITE BROWSER WEB

1) Apri il tuo browser web, e nella barra degli indirizzi digita "192.168.1.1"

Browser compatibili: Internet Explorer, Firefox, Chrome, Safari.

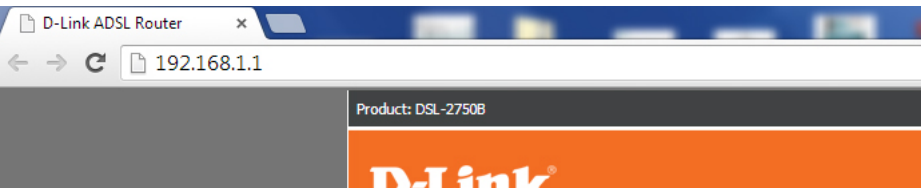


LOGIN

Log in to the router


User Name :

Password :

2) Digita "admin" come User Name e "admin" come Password. Clicca su "Log In".

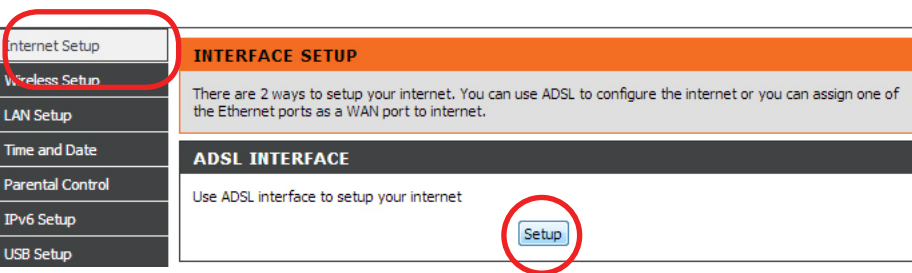

3) Dal menu a sinistra seleziona "Internet Setup". Clicca su "Setup".

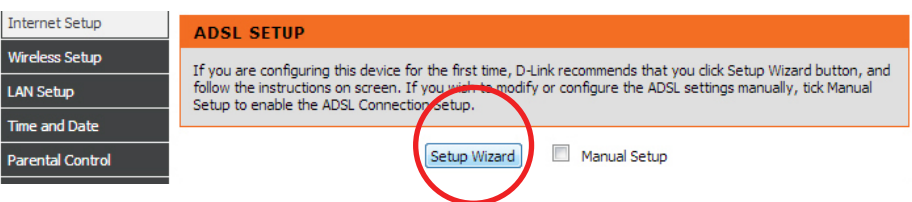

4) Clicca su "Setup Wizard" dopo aver rimosso la spunta da "Manual Setup".

Internet Setup

WELCOME TO D-LINK SETUP WIZARD

This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

- Step 1: Change your router password
- Step 2: Set Time and Date
- Step 3: Select Internet connection
- Step 4: Connect to Internet

Next Cancel

Internet Setup

STEP 1: CHANGE YOUR PASSWORD

The factory default password of this router is 'admin'. To help secure your network, D-Link recommends that you should choose a new password. If you do not wish to choose a new password now, just Click **Skip** to continue. Click **Next** to proceed to next step.

Current password :

New password :

Confirm password :

Back **Next** Skip Cancel

Internet Setup

STEP 2: SET TIME AND DATE

The Time Configuration option allows you to configure, update, and maintain the correct time on the internal system dock. From this section you can set the time zone that you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to automatically adjust the time when needed.

TIME SETTINGS

Automatically synchronize with Internet time server

First NTP time server:

Second NTP time server:

Internet Setup

STEP 3: SELECT INTERNET CONNECTION TYPE

Please select your Country and ISP (Internet Service Provider) from the list below. If your Country or ISP is not in the list, please select "Other".

Country :

ISP Provider :

VPI :

VCI :

Connection Type :

Back **Next** Cancel

5) Clicca su "Next"

6) La password di default è "admin", ma ti consigliamo di cambiarla: inserisci la nuova password e clicca su "Next"

7) Seleziona "Automatically synchronize with Internet time server" e clicca su "Next"

8) Seleziona il tuo Paese e il tuo operatore ISP (l'operatore di telefonia che ti fornisce internet). I campi sottostanti si riempiono automaticamente. Clicca su "Next"

DSL-2750B	SETUP	ADVANCED	MAINTENANCE	STATUS
Internet Setup	STEP 3: SELECT INTERNET CONNECTION TYPE			
Wireless Setup	Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click Next to continue.			
LAN Setup	Username : <input type="text" value="myUserName"/>			
Time and Date	Password : <input type="password" value="*****"/>			
Parental Control	Confirm Password : <input type="password" value="*****"/>			
IPv6 Setup	<input type="button" value="Back"/> <input type="button" value="Next"/> <input type="button" value="Cancel"/>			
USB Setup				
Logout				

9) Digita la "Username" e la "Password" fornite dal tuo ISP, quindi clicca su "Next".

Internet Setup	STEP 4: CONNECT TO INTERNET			
Wireless Setup	Setup completed. Click Back to review or modify settings. Click Apply to submit current settings on router. If your Internet connection does not work, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.			
LAN Setup	<input type="button" value="Back"/> <input type="button" value="Apply"/> <input type="button" value="Cancel"/>			
Time and Date				
Parental Control				

10) Clicca su "Apply".

DSL-2750B	SETUP	ADVANCED	MAINTENANCE	STATUS
Internet Setup	ADSL SETUP			
Wireless Setup	If you are configuring this device for the first time, D-Link recommends that you click Setup Wizard button, and follow the instructions on screen. If you wish to modify or configure the ADSL settings manually, tick Manual Setup to enable the ADSL Connection Setup.			
LAN Setup	<input type="button" value="Setup Wizard"/> <input checked="" type="checkbox"/> Manual Setup			
Time and Date				
Parental Control				
IPv6 Setup	MANUAL ADSL CONNECTION SETUP			
USB Setup	Please select the appropriate option to connect to your ISP.			
Logout	<input checked="" type="radio"/> PPPoE/PPPoA Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users).			
	<input type="radio"/> Dynamic IP Address Choose this option if your ISP uses Dynamic IP Address over DSL.			

11) Il setup ti riporta alla prima pagina di configurazione: sei ora connesso ad internet.

Nota: la scritta "Internet Online" si illumina di verde se la procedura è andata a buon fine.

DSL-2750B // SETUP ADVANCED MAINTENANCE STATUS

Internet Setup
Wireless Setup
 LAN Setup
 Time and Date
 Parental Control
 IPv6 Setup
 USB Setup
 Logout

WIRELESS SETUP

There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup wizard or you can manually configure the connection.

WIRELESS CONNECTION SETUP WIZARD

The following Web-based wizard is designed to assist you for your wireless network setup and wireless device connection.

[Wireless Connection Setup Wizard](#)

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

12) Dal menu a sinistra seleziona "Wireless Setup"
 Clicca su "Wireless Connection Setup Wizard"

Internet Setup
Wireless Setup
 LAN Setup
 Time and Date
 Parental Control
 IPv6 Setup
 USB Setup
 Logout

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Your wireless network is enabled by default. You can simply uncheck the below checkbox to disable wireless.

Enable Your Wireless Network

Give your network a name, using up to 32 characters.
 SSID "
 (1-32 characters)

Set your wireless encryption mode. We will automatically assign a security key to prevent outsiders from accessing your wireless network, the router will automatically assign a security key to your wireless network.

Wireless Security Mode : Auto (WPA or WPA2)
Pre-Shared Key :
 (8-63 characters, such as a~z, A~Z, or 0~9.)

Note: We provide user a random pre-shared key by automatically. You can also set it manually if you do not prefer the key we generate.

English

13) Nel campo SSID, digita un nome a tua scelta: questo sarà il nome della tua rete Wireless.
 Nel campo Pre-Shared key, digita una password a tua scelta: questa sarà la password della tua rete wireless.
Nota: se lasci questo campo vuoto, il setup genererà una password random automaticamente.

Internet Setup
Wireless Setup
 LAN Setup
 Time and Date
 Parental Control
 IPv6 Setup
 USB Setup
 Logout

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

Wireless Status : Enabled
Network Name(SSID) : myWirelessNetwork
Wireless Security Mode : Auto(WPA or WPA2)
Network Key : password

[Back](#) [Apply](#) [Cancel](#)

13) Clicca su "Apply"

WAITING FOR SETTING PARAMETERS...

14) Attendi il completamento della procedura.

DSL-2750B // SETUP **ADVANCED** MAINTENANCE STATUS

Port Forwarding
Application Rules
QoS Setup
Outbound Filter
Inbound Filter
Wireless Filter
DNS Setup
Firewall & DMZ
Advanced Internet
Advanced Wireless
Advanced LAN
Port Mapping
SNMP Setup
Remote Management
Routing Setup
W-R-069 Client
Wi-Fi Protected Setup
IPv6 Firewall

WI-FI PROTECTED SETUP

Wi-Fi Protected Setup allows users to easily add devices to the wireless network by using a push button or PIN.
Devices must support Wi-Fi Protected Setup in order to be configured by this method.

WI-FI PROTECTED SETUP

Enable
 Lock Wireless Security Settings
WPS Configured State : Unconfigured **Set to Configured**

PIN SETTINGS

Current PIN : 19951683
Reset PIN to Default Generate New PIN

ADD WIRELESS STATION

Add Wireless Device with WPS

Apply Cancel

15) Dal menu in alto seleziona "Advanced".

Dal menu a sinistra seleziona "Wi-Fi Protected Setup".

Clicca su "Set to Configured" dopo esserti accertato che vi sia la spunta su "Enable".

ATTIVAZIONE DELLA SICUREZZA DELLA RETE WIRELESS

Product: DSL-2750B

D-Link

DSL-2750B // **SETUP** ADVANCED MAINTENANCE STATUS

Internet Setup
Wireless Setup
LAN Setup

Time and Date
Parental Control
IPv6 Setup
USB Setup
Logout

Internet Online
English
Reboot

WIRELESS SETUP

There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup wizard or you can manually configure the connection.

WIRELESS CONNECTION SETUP WIZARD

The following Web-based wizard is designed to assist you for your wireless network setup and wireless device connection.

Wireless Connection Setup Wizard

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

ADD WIRELESS DEVICE WITH WPS(WI-FI PROTECTED SETUP) WIZARD

According to the Wi-Fi 802.11n specification, Wi-Fi Protected Setup is not fully supported with WEP security mode. We will disable the Wi-Fi Protected Setup if you chose WEP security mode.

Add Wireless Device with WPS

MANUAL WIRELESS CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Manual Wireless Connection Setup

- 1) Dal menu in alto selezione "Setup".
Dal menu a sinistra seleziona "Wireless Setup".
Clicca su "Manual Wireless Connection Setup".

Internet Setup
Wireless Setup
LAN Setup

Time and Date
Parental Control
IPv6 Setup
USB Setup
Logout

Internet Online
English
Reboot

WIRELESS

Use this section to configure the wireless settings for your D-Link router. Please note that changes made on this section will also need to be duplicated to your wireless clients and PC.

WIRELESS NETWORK SETTINGS

Enable Wireless: Always Add New

Wireless Network Name (SSID): myWirelessNetwork

Wireless Channel: Auto

802.11 Mode: Mixed 802.11n, 802.11g and 802.11b

Channel Width: Auto 20/40 MHz

Transmission Rate: Best (automatic) (Mbit/s)

Visibility Status: Visible Invisible

AP Isolation:

- 2) Accertati che le impostazioni corrispondano alla immagine qui di fianco; il campo "Wireless Network Name (SSID)", se vuoto, deve contenere lo stesso nome già impostato durante la configurazione della connessione.

WIRELESS SECURITY MODE

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA-Personal, and WPA-Enterprise. WEP is the original wireless encryption standard. WPA provides a higher level of security. WPA-Enterprise does not require an authentication server. The WPA-Enterprise option requires an external RADIUS server.

Security Mode :

WPA

Use **WPA or WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

WPA Mode : (AES)

Group Key Update Interval :
(seconds)

PRE-SHARED KEY

Pre-Shared Key :

Please take note of your SSID and security Key as you will need to duplicate the same settings to your wireless devices and PC.

- 3) Dal menu a tendina seleziona "WPA 2 Only".
Nel campo "Pre-Shared Key" digita la password desiderata per la tua rete Wi-Fi.

WAITING FOR SETTING PARAMETERS...

- 4) Attendi il completamento della procedura.