

# D-Link Quick Installation Guide

This product can be setup using any current web browser, i.e., Internet Explorer 6 or Netscape Navigator 7.0



## DSA-3100P

Ticket Printer for DSA-3100

## Before You Begin

You will need a DSA-3100 Public/Private Gateway with a wireless access point pre-installed.

**Important: TURN OFF the power to the DSA-3100 before installing the DSA-3100P. The DSA-3100P can only work with the D-Link DSA-3100 Public/Private Gateway**

## Check Your Package Contents



**DSA-3100P Ticket Printer  
with Paper Roll**



**RS-232 Serial Communication Cable**



**24V DC, 1.7A Power Adapter**



Using a power supply with a different voltage rating will damage this product and void its warranty.

If any of the above items are missing, please contact your reseller.

# 1

## Preparing the DSA-3100P

Pull down on the green handle to release the cover.



Insert the roll of paper



# 1

## Preparing the DSA-3100P(cont.)


Pull some of the paper out and close the cover.



Connect to the DSA-3100 with the provided **RS-232 serial cable**. On the other side of the RS-232 cable, plug in the **RJ-11 connector** into the DSA-3100P Ticket Printer.

**RJ-11 Connector**

**P/S2 Connector**

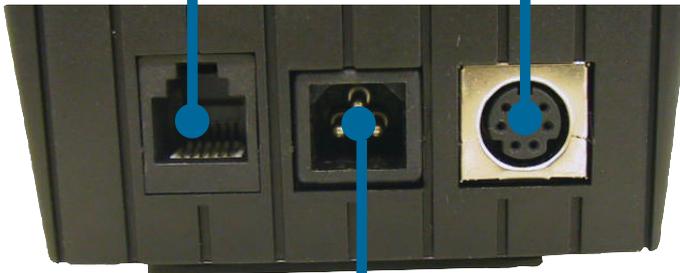

**Power Connector**

Attach the power adapter and turn the DSA-3100P on. Then power on the DSA-3100 and all wireless access points. Wait 1~2 minutes until the status LED on the DSA-3100 becomes stable.

## 2

## Setting up your DSA-3100P

**D-Link**  
Building Networks for People

**DSA-3100**  
Wireless Service Gateway

Home Advanced Tools Status Help

Wizard  
System  
WAN  
Authentication  
Local Network  
User Manager

**On-demand Account Configuration**

Store name	D-Link	(e.g.: D-Link. Max: 8 char)
Account range	from 0001 to 1000	(e.g.: 0001~2000. Max: 2000)
Receipt header	Welcome!	(e.g.: Welcome!)
Receipt footer	Thank You!	(e.g.: Thank You!)
Printer baud rate	9600	
Account expires after	3	days
Session expires after	60	minutes
WLAN ESSID	dlink	(e.g.: dlink)
WEP key	1:	
WEP key	2:	
WEP key	3:	
WEP key	4:	
Price	US\$2	(e.g.: US\$2)


[User List](#)

Back Apply Cancel Help

Log on to the DSA-3100 as the **administrator**. Go to **Home>User Manager**, then click **On-Demand Users** for the configuration page. Enter the **Wireless LAN ESSID**, **WEP keys**, and **other information that you would like shown on the ticket**. Click **Apply** so the settings can take effect.

# 2

## Setting up your DSA-3100P

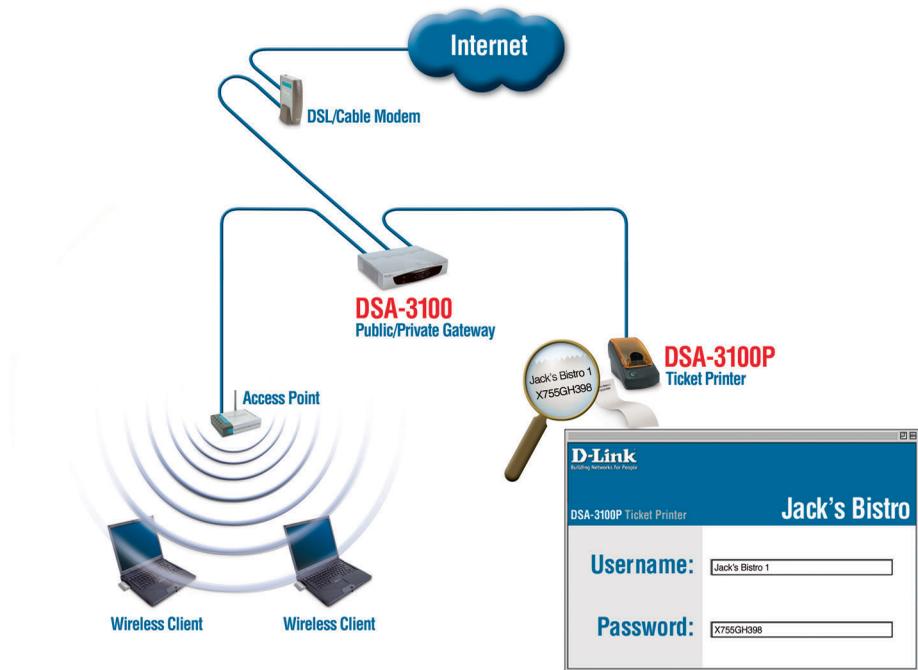

Press the button on the DSA-3100P to print a ticket that grants guests or paying patrons access to the hotspot. The DSA-3100P communicates with the DSA-3100 Public/Private Gateway to generate a unique login username and password.

# Notes

# Notes

## Technical Support

You can find the most recent software and user documentation on the **D-Link** website.

**D-Link** provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact **D-Link** technical support through our website or by phone.

### Tech Support for customers within the United States:

***D-Link Technical Support over the Telephone:***

(877) 453-5465

24 hours a day, seven days a week

***D-Link Technical Support over the Internet:***

<http://support.dlink.com>

email: [support@dlink.com](mailto:support@dlink.com)

### Tech Support for customers within Canada:

***D-Link Technical Support over the Telephone:***

(800) 361-5265

Monday to Friday 8:30am to 9:00pm EST

***D-Link Technical Support over the Internet:***

<http://support.dlink.ca>

email: [support@dlink.ca](mailto:support@dlink.ca)

