

## Mini KVM Switch Kit With USB Port for 2 PCs

*Includes KVM Switch and 2 Sets of Built-in Cables & USB 2.0 Port*

The DKVM-2KU 2-port mini KVM (Keyboard, Video and Mouse) switch kit is a cost effective kit for home and office users. This double function kit allows you to easily control 2 different PCs from a single set of keyboard, mouse, and VGA monitor; and to share a USB device with 2 PCs. It includes a 2-port KVM switch, a USB 2.0 port built into the switch, and 2 sets of built-in cables for ready connection to 2 PCs. The switch provides many easy-to-use features and is perfect for home and the small business.

### Cost-effective for PC Users

If you have 2 PCs and need to use them at the same time, the DKVM-2KU saves you the money and space by allowing you to control your 2 computers from a set of keyboard, monitor and mouse. Or, you may have a better, bigger monitor and want to connect both PCs to it, the DKVM-2KU allows you to do this. 2 sets of cables are attached to the KVM switch ready for use, dispensing you of the need to prepare separate cables and connect them to the switch.

### Versatile Functions

The DKVM-2KU utilizes advanced microprocessor emulation to intelligently manage each KVM port. This allows simultaneous boot-up of all attached PCs. Auto scan, audible feedback, and keyboard "Hot Keys" make the DKVM-2KU simple to use and manage. There is also a control button located on the front panel that allows you to switch between the PCs.

### Status Save and High Resolution Support

The DKVM-2KU supports VGA, SVGA, and MultiSync monitors at up to 2048 x 1536 resolution at 72Hz refresh rate. Support for Microsoft IntelliMouse is provided.

### USB 2.0 Port to Share USB Devices

A USB 2.0 port is built into this KVM switch to allow connection to a USB-supported device or a USB hub. This allows you to share your USB printer, scanner, card reader or other devices among the 2 connected PCs. This USB port is also backward compatible with USB 1.1 devices. By connecting this USB port to a USB hub, you can also share more than 1 USB device with your 2 PCs. In the Auto Scan mode, the USB device switching will come with the computer scan sequence.

### Features

- 2 KVM ports to control of 2 computers from a single set of keyboard, monitor and mouse
- Built-in USB 2.0 port to share a USB device between the 2 PCs
- Saves desktop space, cost
- Auto scan mode sequences through PCs
- Audible feedback for confirmation while switching between PCs
- Front panel LED indicators for selected PC
- Switching between PCs using front panel SELECT button or Hot Key command
- Supports SVGA, VGA, and multi-sync monitors
- Video resolutions up to 2048 x 1536
- Successfully tested with following mice: Microsoft IntelliMouse, IntelliMouse with IntelliEye, and IntelliMouse Explorer; Logitech FirstMouse+, Logitech MouseMan+

# DKVM-2KU

## Technical Specifications

## KVM Switch

### Console Connectors (connect to keyboard, mouse, monitor)

- Keyboard connector: mini DIN-6 PIN female
- Mouse connector: mini DIN-6 PIN female
- Monitor connector: HD 15 PIN female

### KVM & USB Cables With Connectors (connect to computers)

- 2 cables each 1.8 meter (6 feet) long attached to KVM switch
- 2 keyboard connectors: mini DIN-6 PIN male
- 2 mouse connectors: mini DIN-6 PIN male
- 2 monitor connectors: HD 15 PIN male
- 2 USB Type A connectors

### USB Port Standard

USB 2.0

### Diagnostic LEDs

2 port LEDs for 2 connected PCs

### PC Selection (Manually switching back and forth between 2 PCs)

- Through Push buttons
- Through Hot Key
- Switching confirmation: buzzer sound

### Physical & Environmental

#### Power Voltage

5V 1A

#### Power Input

From PC's PS2 port, no external power adapter required

#### Power Consumption

5V 70mA

#### Dimensions

104 x 62 x 28 mm (KVM switch only)

#### Weight

570 grams (KVM switch & 2 sets of KVM & USB cables)

#### Operating Temperature

0° to 40 °C

#### Storage Temperature

-20° to 60 °C

#### Operating Humidity

0% to 80%

#### Storage Humidity


0% to 80%

#### Emission (EMI)

- FCC Class B
- CE Class B
- C-Tick

#### Box Includes

- DKVM-2KU switch with 2 built-in sets of 1.8 m (6 ft) KVM cables
- Quick Installation Guide

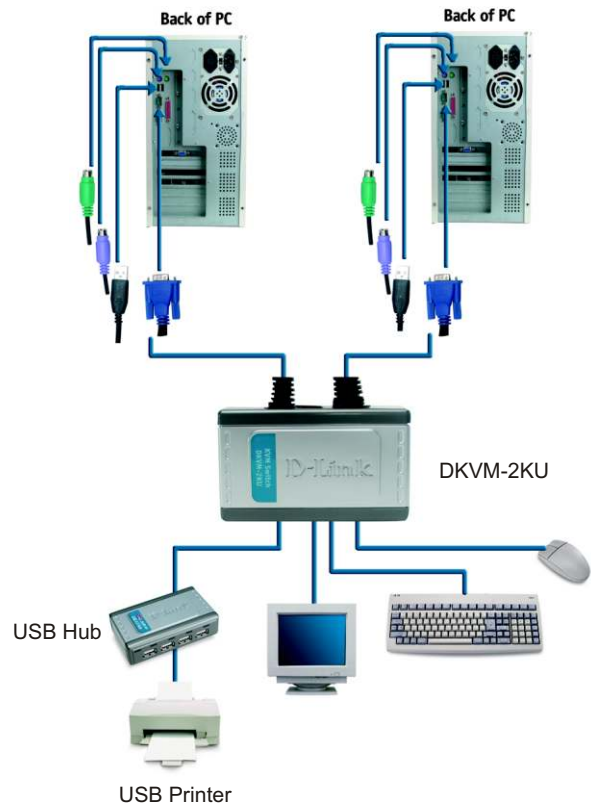

ACN 052 202 838

### Ordering Information

**DKVM-2KU**

2-port mini KVM switch kit with built-in USB port

Worldwide packaging (multi-lingual)

# D-Link®

Specifications subject to change without prior notice.  
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

<b>U.S.A</b>	TEL: 1-949-788-0805	FAX: 1-949-753-7033
<b>Canada</b>	TEL: 1-905-8295033	FAX: 1-905-8295095
<b>Europe</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
<b>Germany</b>	TEL: 49-6196-77990	FAX: 49-6196-7799300
<b>France</b>	TEL: 33-1-30238688	FAX: 33-1-30238689
<b>Benelux</b>	TEL: 31-10-282-1445	FAX: 31-10-282-1331
<b>Italy</b>	TEL: 39-2-2900-0676	FAX: 39-2-2900-1723
<b>Iberia</b>	TEL: 34-93-4090770	FAX: 34-93-4910795
<b>Sweden</b>	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
<b>Norway</b>	TEL: 47-22-309075	FAX: 47-22-309085
<b>Denmark</b>	TEL: 45-43-969040	FAX: 45-43-424347
<b>Finland</b>	TEL: 358-9-2707-5080	FAX: 358-9-2707-5081
<b>Singapore</b>	TEL: 65-6774-6233	FAX: 65-6774-6322
<b>Australia</b>	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
<b>Japan</b>	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868
<b>China</b>	TEL: 86-10-8518-2533	FAX: 86-10-8518-2250
<b>India</b>	TEL: 91-22-652-6696	FAX: 91-22-652-8914
<b>Middle East</b>	TEL: 9714-8834234	FAX: 9714-8834394
<b>Turkey</b>	TEL: 90-212-335-2553	FAX: 90-212-335-2500
<b>Chile</b>	TEL: 56-2-232-3185	FAX: 56-2-232-0923
<b>Brasil</b>	TEL: 55-11-3094-2910	FAX: 55-11-3094-2921
<b>South Africa</b>	TEL: 27(0)1266-52165	FAX: 27(0)1266-52186
<b>Russia</b>	TEL: 7-095-737-3389	FAX: 7-095-737-3390
<b>Taiwan</b>	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
<b>D-Link Corp.</b>	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299



RECYCLABLE  
Rev. 01 (Aug. 2003)