

1-Port KVM Switch Over IP

For Remote Control of Server

- Adds Remote KVM IP Access to Existing Server
- 1 KVM Port to Server
- Ethernet Port for LAN/WAN Connection
- RS-232 Modem Port for Backup
- VGA, PS/2, USB 2.0 Support

FEATURES

- **Compatible With Most KVM Switches & All D-Link KVM switches**
- **Uses Popular Web-browser for Handling**
- **Video Refresh Upgradeable From Remote Session**
- **Up to 15 Users Login at the Same Time**
- **256 bit SSL Security**
- **BIOS Level Access**
- **Mouse Synchronization**
- **Video Calibration Adjustment**
- **User-definable Hot Keys**
- **Uses Standard KVM Cables**
- **Auto-Logout When Idle More Than 30 Minutes**
- **Screen Refresh Rate: 1280 x 1024 at 60Hz (Local 1600 x 1200)**
- **Network Time Protocol (NTP) Client**
- **DDNS Support**
- **DHCP Client**

The D-Link DKVM-IP1 KVM Switch over IP provides remote KVM access via a LAN, a WAN, or an Internet connection to a server. Designed for server control with VGA, PS/2 and USB support, this KVM over IP appliance integrates KVM, Ethernet interface and external modem support in a one-box solution.

Control of Single or Multiple Servers. The DKVM-IP1 provides secure high-performing KVM Over IP technology with a direct connection to the back of your server. This KVM switch can also be connected to a multi-port KVM switch for control of multiple servers.

Remote Connection. The DKVM-IP1 contains a default IP address, which can be easily changed to another IP address used by your network. From a remote site, your IT administrator can key in the IP address of the DKVM-IP1 from a web browser to connect to it and start control a remote server. This type of remote control can help eliminate on-site maintenance costs and service calls, and avoids for you emergency phone calls from your remote data centers. In addition to troubleshooting, this KVM switch can also let an IT administrator upgrade or configure a PC system from the Internet. Another application of this KVM switch is remote mass storage control.

Security. The DKVM-IP provides SSL (up to 256-bit) encryption protocol to prevent security breaches.

Device Interfaces. The DKVM-IP1 switch includes one interface to a server, which includes a video connection, a PS/2 keyboard connection, a PS/2 mouse connection, and a USB 2.0 connection. To the console side, it has a video port, a PS/2 mouse port and a PS/2 keyboard port. Remote site connection is through a 10/100BASE-TX Ethernet port, which can be connected to a LAN or to a remote router. External modem support is available through an RS-232 COM port, in case your network is down.



Technical Specifications

Network/Modem Interfaces

- RJ-45 10/100BASE-TX Ethernet port
- RS-232 DB-9 port

Console Connection

- 1 mini Din 6 pin connector for keyboard connection
- 1 mini Din 6 pin connector for mouse connection
- 1 HDDB 15 pin connector for monitor connection

PC or KVM Switch Connection

- 1 mini Din 6 pin connector for keyboard connection
- 1 mini Din 6 pin connector for mouse connection
- 1 HDDB 15 pin connector for monitor connection

USB

USB 2.0 Type B port

Reset Button

LED Indicators

- Link/Speed
- Activity

VGA Resolution

- Local: 1600 x 1200
- Remote: 1280 x 1024

Physical & Environmental

Power

Through 5V 2.5A DC power adapter

Dimensions

167 x 141 x 27 mm

Weight

670 grams

Operating Temperature

0° to 50°C

Storage Temperature

-20° to 60 °C

Humidity


0% to 80% non-condensing

Emission (EMI)

- FCC Class A
- CE
- C-Tick

Box Includes

- DKVM-IP1 switch
- Quick Installation Guide
- 3 in1 KVM cable
- Serial cable
- USB 2.0 cable
- CD-ROM with manual and software
- Rack mount kit
- Cat.5 cable
- 5V 2.5A DC power adapter

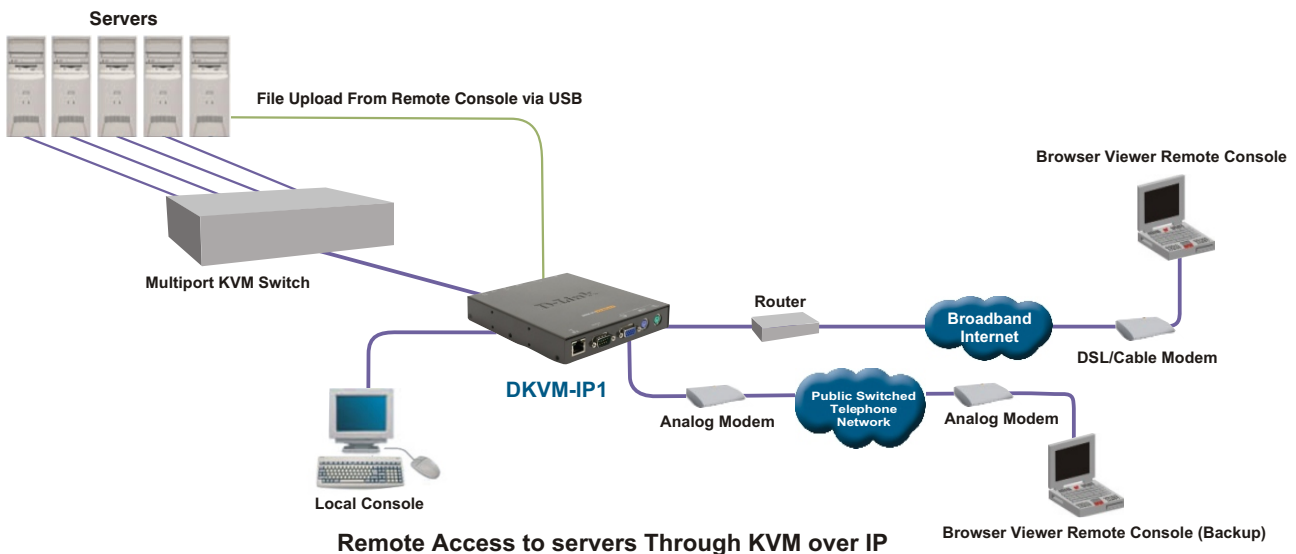

D-Link Worldwide Offices

U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
Europe (U. K.)	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	India	TEL: 91-022-26526696	FAX: 91-022-26528914
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	LatinAmerica	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707 5081	Brazil	TEL: 55-11-218-59300	FAX: 55-11-218-59322
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Portugal	TEL: 351-21-8688493		Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099 #350
Czech Republic	TEL: 420-(603)-276-589		China	TEL: 86-10-58635800	FAX: 86-10-58635799
Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-8168
Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898